

**WestminsterResearch**

<http://www.westminster.ac.uk/westminsterresearch>

**Carbon emissions in China's thermal electricity and heating industry: An input-output structural decomposition analysis**

**Ling, Y., Xia, S., Cao, M., He, K., Lim, M.K., Sukumar, A., Yi, H. and Qian, X**

NOTICE: this is the authors' version of a work that was accepted for publication in the Journal of Cleaner Production. Changes resulting from the publishing process, such as peer review, editing, corrections, structural formatting, and other quality control mechanisms may not be reflected in this document. Changes may have been made to this work since it was submitted for publication. A definitive version was subsequently published in the Journal of Cleaner Production, DOI: 10.1016/j.jclepro.2021.129608, 2021.

The final definitive version in Journal of Cleaner Production is available online at:

<https://doi.org/10.1016/j.jclepro.2021.129608>

© 2021. This manuscript version is made available under the CC-BY-NC-ND 4.0 license

<https://creativecommons.org/licenses/by-nc-nd/4.0/>

The WestminsterResearch online digital archive at the University of Westminster aims to make the research output of the University available to a wider audience. Copyright and Moral Rights remain with the authors and/or copyright owners.

1 **Carbon emissions in China's thermal electricity and heating industry: An input-**  
2 **output structural decomposition analysis**

3  
4  
5 **Abstract**

6 CO<sub>2</sub> emissions from China accounted for 27 per cent of global emissions in 2019. More  
7 than one third of China's CO<sub>2</sub> emissions come from the thermal electricity and heating  
8 sector. Unfortunately, this area has received limited academic attention. This research  
9 aims to find the key drivers of CO<sub>2</sub> emissions in the thermal electricity and heating  
10 sector, as well as investigating how energy policies affect those drivers. We use data  
11 from 2007 to 2018 to decompose the drivers of CO<sub>2</sub> emissions into four types, namely:  
12 energy structure; energy intensity; input-output structure; and the demand for electricity  
13 and heating. We find that the demand for electricity and heating is the main driver of  
14 the increase in CO<sub>2</sub> emissions, and energy intensity has a slight effect on increasing  
15 carbon emissions. Improving the input-output structure can significantly help to reduce  
16 CO<sub>2</sub> emissions, but optimising the energy structure only has a limited influence. This  
17 study complements the existing literature and finds that the continuous upgrading of  
18 power generation technology is less effective at reducing emissions and needs to be  
19 accompanied by the market reform of thermal power prices. Second, this study extends  
20 the research on CO<sub>2</sub> emissions and enriches the application of the IO-SDA method. In  
21 terms of policy implications, we suggest that energy policies should be more flexible  
22 and adaptive to the varying socio-economic conditions in different cities and provinces  
23 in China. Accelerating the market-oriented reforms with regard to electricity pricing is  
24 also important if the benefits of technology upgrading and innovation are to be realised.

25  
26  
27 **Keywords**

28 Carbon dioxide reduction; Energy intensity; Energy structure; Electricity;  
29 Decomposition analysis; China

30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40

## 41 **1 Introduction**

42 Currently, China's electricity supply structure is primarily dominated by thermal  
43 electricity, which accounts for more than 70 per cent of the total electricity generated  
44 in the country; more than 60 percent of thermal electricity is generated by burning coal  
45 (National Bureau of Statistics, 2016). In 2016, China's electric power industry  
46 consumed 52 percent of the country's coal and released 34 per cent of the country's CO<sub>2</sub>  
47 emissions (Yang and Lin, 2016). The International Environment Agency (IEA) reported  
48 that China's electric power industry released 48.6 per cent of the country's CO<sub>2</sub> in 2015,  
49 which is higher than the global average of 41.9 per cent during the same period (IEA,  
50 2016). In order to facilitate a move away from high carbon dependency, China has been  
51 promoting a non-fossil energy substitution policy in order to transform the energy sector  
52 and accelerate the upgrading of technology used within the industry.

53 During the 11<sup>th</sup> period (2006-2010) and the 12<sup>th</sup> period (2011-2015) of the five-  
54 year plan<sup>1</sup>, the Chinese government introduced a series of carbon reduction policies in  
55 order to accelerate the upgrading of technology, reduce energy consumption and  
56 optimise the energy structure in the thermal and heating sector. One of the key tasks  
57 undertaken during the 12<sup>th</sup> period of the five-year plan was to advance the reforms in  
58 energy production, prioritise and strengthen the energy conservation strategy, and  
59 comprehensively improve the efficiency of energy conversion and utilisation (National  
60 Energy Administration, 2013). However, despite these efforts, carbon emissions from  
61 the thermal and heating sector continued to rise significantly during the period between  
62 2007 and 2015 (National Energy Administration, 2016).

63 The contradiction between China's energy policy goals and the reality of the  
64 situation has put great pressure on the country to achieve its carbon emission reduction  
65 targets. In response to the huge pressures created by the low-carbon movement, the  
66 National Development and Reform Commission (NDRC) held a press conference on  
67 19<sup>th</sup> December 2017 at which they announced the official launch of the national carbon  
68 emission trading system, and issued the 'national carbon emission trading market  
69 construction plan (electricity generation industry)'. As the only industry to be included  
70 in the early stages of creating the national carbon market, the electricity power industry  
71 has formally entered the era of carbon constraints. In 2017, approximately 1,700  
72 electrical enterprises were included in the national carbon market, emitting about 3  
73 billion tons of carbon dioxide annually. However, due to the existing energy structure  
74 and the historical electricity installation layout, it is likely that the domestic electricity  
75 production structure will continue to be dominated by coal-fired plants. In other words,  
76 it is difficult for China to effectively change its electricity supply structure, which  
77 means that it will remain a predominantly high-carbon based system in the short term.  
78 In addition to the current constraints on the electricity production structure, China's  
79 electric power industry also has to contend with a significant carbon lock-in effect.  
80 Through the use of measures such as the replacement of non-fossil energy, improving  
81 the utilisation of coal, and upgrading the technology used to generate thermal electricity,

---

<sup>1</sup> The five-year plan is a blueprint that sets out goals and directions for the long-term development of China's national economy.

82 the industry succeeded in reducing carbon dioxide emissions by 13.7 billion tons from  
83 2006 to 2018. However, the average operating lifespan of coal-fired generating units in  
84 China is about 12 years, and the average operating lifespan of million-kilowatt units is  
85 about 5 years; consequently, it is difficult to eliminate the carbon lock-in effect of  
86 thermal electricity generation in the short term.

87 Previous studies have aimed to investigate the relative contributory factors to CO<sub>2</sub>  
88 emissions (Ang, 1999; Sun, 2005; Zhang et al., 2008, Mi, et al., 2017; Mi, et al., 2020;  
89 Zheng et al., 2019). The most frequently used methods include the IPCC method (IPCC,  
90 2006), the IPAT method (Fu et al., 2015), the metafrontier non-radial MCPI method  
91 (Zhou, 2012); the DEA method (Yang, 2009); and the LMDI method (Zhou, 2014; Liu,  
92 2015). However, although these studies have examined various impact factors such as  
93 the energy intensity and energy structure of energy-related CO<sub>2</sub> emissions, they have a  
94 drawback in that they have mainly focused on a single CO<sub>2</sub> emissions index and failed  
95 to comprehensively reflect the linkages between the different industrial sectors.  
96 Therefore, it is hard to assess the impact of sectoral connection and economic structural  
97 factors on carbon emissions.

98 To this end, this study is designed to explore two main perspectives: first, it  
99 examines the energy structure, energy intensity, and electricity generation technology  
100 on the production side; and second, it analyses electricity and heating demand on the  
101 demand side. In order to identify the cause of the conflict between the objectives of  
102 China's energy policy and the reality, it is important to quantify the drivers and assess  
103 the impact of energy policy on each driver. Currently, CO<sub>2</sub> intensity and per capita CO<sub>2</sub>  
104 emissions are commonly used to assess CO<sub>2</sub> emissions (Fan et al., 2007; Jobert et al.,  
105 2010). Based on the Input-Output (IO) tables that link the thermal electricity and  
106 heating sector and other sectors, this study assesses the key factors that contribute to  
107 generating CO<sub>2</sub> emissions, by examining the energy structure, energy intensity, and  
108 electricity generation technology (Paul, 2016; Wang, 2010; Wang et al., 2019).

109 Although China is committed to optimising its energy structure and constantly  
110 developing new thermal electricity generation technologies, carbon emissions from the  
111 thermal electricity and heating sector have continued to rise. This study aims to examine  
112 the key drivers of CO<sub>2</sub> emissions in the thermal electricity and heating sector, as well  
113 as investigating how energy policies affect those drivers. In this study, we use an input-  
114 output structural decomposition analysis (IO-SDA) method to investigate the drivers of  
115 CO<sub>2</sub> emissions in China's thermal electricity and heating sector from 2007 to 2018. First,  
116 we calculate the CO<sub>2</sub> emissions as well as assessing the energy structure. Second, the  
117 study investigates the contribution and the evolutionary trend of the demand structure  
118 of different industry sectors with regard to CO<sub>2</sub> emissions in China's thermal electricity  
119 and heating sector. Third, the slack based measurement data envelopment analysis  
120 (SBM-DEA) model with unexpected output, and the Adjacent Malmquist model, are  
121 used to evaluate the energy efficiency and technical efficiency values for each of the  
122 provinces, respectively. Finally, this study analyses the key drivers of CO<sub>2</sub> emission and  
123 the internal causes of changes in each driver, as well as assessing the impact of energy  
124 policy on each driver. The effect of optimising the energy structure of China's thermal  
125 electricity and heating sector is also taken into consideration.

126 This research contributes to the existing literature regarding the reduction of CO<sub>2</sub>  
127 emissions from the electricity sector in the following ways. First, it complements the  
128 relevant literature on the impacts of upgrading electricity generation technology on  
129 reducing carbon emissions by introducing the Adjacent Malmquist model (Zhang, 2013;  
130 Wang et al., 2019). The existing research argues that the continuous upgrading of  
131 electricity generation technology has significantly reduced carbon emissions in China  
132 (Zhang, 2013; Wang et al., 2019). Nevertheless, our study finds that the reality does not  
133 conform to expectations of previous scholars, by capturing the actual situation  
134 regarding emissions reduction in the thermal electricity and heating sector during the  
135 period from 2007 to 2018, based on the three-yearly IO data. This finding helps to offer  
136 insight into the potential conflict between energy policy and the reality of the situation  
137 in practice. In addition, the dynamic analysis the of technical efficiency of the thermal  
138 electricity and heating sector can help to predict further trends and enable energy policy  
139 to be tailored accordingly.

140 Second, this study expands the literature on CO<sub>2</sub> emissions from electricity  
141 generation in China (Zhang et al., 2013; Paul, 2016; Wang et al., 2019) by applying the  
142 SBM-DEA model with unexpected output to assess the effects of energy structure  
143 optimisation in the thermal electricity and heating sector for 30 provinces between  
144 2007 and 2018. The existing research has only focused on the overall effect on  
145 emissions reduction of optimising the energy structure, but without measuring the slack  
146 and redundancy of the input and output variables. This aspect of the study complements  
147 the existing related research, and provides a valuable reference that the government can  
148 use to adjust the energy structure of the thermal electricity and heating sector in a  
149 scientific and rational way, and to formulate appropriate energy structure optimisation  
150 strategies.

151 Third, this study enriches the application of the IO-SDA method (e.g., Su and Ang,  
152 2012; Su et al., 2013; Wei et al., 2017). By refining the decomposition, we clarify the  
153 mechanism by which the industrial sectors' final demand is transmitted to the reduction  
154 of emissions in the thermal electricity and heating sector. In addition, the impacts of  
155 adjustments in energy consumption on the energy structure and the impact of energy  
156 intensity on carbon emissions in different regions are also evaluated. The use of  
157 provincial-level data and the refined analysis help to reveal differences between various  
158 regions and thus provide a more detailed reference for formulating carbon emission  
159 reduction policies. This part of the research also complements the Karmellos et al.'s  
160 (2016) study by providing theoretical support for promoting the achievement of CO<sub>2</sub>  
161 reduction targets, specifically with regard to the thermal electricity and heating sector  
162 in developing countries.

163 The paper is organised as follows: Section 2 reviews the literature in relation to  
164 energy intensity, energy efficiency, electricity generation technology and energy  
165 structure. Section 3 explains the data and methodology. Section 4 presents the results.  
166 Section 5 offers a discussion and suggests policy implications. Section 6 summarises  
167 the key findings of the paper and highlights the main contributions of this research.  
168

169 **2 Literature review**

170 Carbon emissions from electricity generation dominate China's energy-related  
171 CO<sub>2</sub> emissions. Evaluating the performance of fossil fuel electricity generation and its  
172 potential for reducing carbon emissions are of great significance with regard to  
173 promoting low-carbon development (Zhou, 2012). Many studies have explored  
174 potential ways of reducing CO<sub>2</sub> emissions from electricity generation and provided  
175 policy suggestions. For example, Maruyama and Eckelman (2009) estimated long-term  
176 reduction trends in 138 countries and regions, with an emphasis on non-Organization  
177 for Economic Cooperation and Development (OECD) countries, and Ang et al. (2011)  
178 assessed CO<sub>2</sub> reduction in 129 countries, excluding the six Gulf Cooperation Council  
179 member countries, recorded by the IEA statistical database. Unlike the benchmark  
180 studies described above, Zhou (2012) applied a non-radial direction distance function  
181 method to evaluate the effectiveness of CO<sub>2</sub> emission reduction strategies and found  
182 that OECD countries performed better in terms of reducing CO<sub>2</sub> emissions from  
183 electricity generation. There are two streams of literature related to our study. The first  
184 stream focuses on evaluating the CO<sub>2</sub> index and exploring the energy intensity, energy  
185 efficiency and electricity generation technology in China's electricity sector using the  
186 framework of low carbon development. Studies within the second stream have tried to  
187 identify the driving force(s) behind CO<sub>2</sub> emissions from the demand side.

188

189 *2.1 Energy intensity, energy efficiency and electricity generation technology*

190 *2.1.1 Energy intensity*

191 In terms of electricity generation, carbon intensity denotes the amount of carbon  
192 emissions per unit of electricity generation (Peng and Tao, 2018). Zhang (2005)  
193 investigated the carbon intensity of electricity generation in three Chinese provinces,  
194 Guangdong, Liaoning and Hubei, from 1990 to 2010; he found that the declining trend  
195 oincarbon intensity with regard to electricity generation and its provincial variations  
196 were mainly due to complex central planning, financial and institutional factors. In order  
197 to improve the estimation accuracy of carbon intensity in China's industrial sector  
198 (including the electricity sector) and provide a more comprehensive reference for  
199 energy policy, Liu (2015) firstly applied the Logarithmic Mean Divisia index (LMDI)  
200 to conduct an in-depth study of the factors affecting carbon intensity and divided these  
201 into three categories: the emission coefficient effect; the energy intensity effect; and the  
202 energy structure effect. The results showed that the energy intensity effect was the main  
203 driving force in terms of reducing carbon intensity from 1996 to 2012. Ang (2016)  
204 studied the aggregate carbon intensity (ACI) for electricity generation at a national level  
205 and found that the ACI in China had fallen from 0.905 in 1990 to 0.6916 in 2013. This  
206 reduction could be due to improved energy efficiency rather than fuel switching.

207

208 *2.1.2 Energy efficiency*

209 With regard to electricity generation, many studies have applied the production  
210 efficiency approach, involving methods such as data envelopment analysis (DEA), to

211 investigate the efficiency of thermal electricity generation in China. Yang (2009)  
212 established six models based on DEA to assess the performance of each decision unit.  
213 Yang (2010) evaluated the energy efficiency of China's thermal electricity production  
214 in 2002. In addition, Zhou et al. (2012) also used the DEA model to explore the  
215 efficiency of thermal electricity generation. As well as conducting DEA, Zhou (2014)  
216 used the LMDI method to investigate the efficiency of China's thermal electricity  
217 generation on a regional basis from 2004 to 2010. He found that reducing energy  
218 intensity and optimising the energy structure can contribute to CO<sub>2</sub> reduction. Liu (2015)  
219 applied the LMDI to decompose China's carbon intensity into three different effects:  
220 the emission coefficient effect; the energy intensity effect; and the energy structure  
221 effect for the period from 1996 to 2012; he found that energy efficiency improvement  
222 plays a key role in reducing energy intensity. In addition to this, Choi and Ang (2012)  
223 applied an attribution analysis to quantify the real changes that had occurred in terms  
224 of energy intensity. They concluded that the effects of energy intensity mainly  
225 contribute to reducing carbon intensity and also found that the effect of the emission  
226 coefficient on carbon intensity increased with the expansion of electricity consumption.  
227

### 228 *2.1.3 Electricity generation technology and energy structure*

229 To provide insights into the effects of technological innovation and structural  
230 adjustment that have occurred within China's electricity industry in recent years, Peng  
231 and Tao (2018) investigated changes in the carbon intensity of electricity from 1980 to  
232 2014. They found that, since 1980, the impact of technological innovation on the  
233 decline in carbon intensity has been greater than that of structural adjustment. However,  
234 as electricity generation technology matures, carbon emission reduction in China's  
235 electricity industry will come to rely mainly on renewable energy. Researchers have  
236 devoted much attention to evaluating the work of decision-making units. Many existing  
237 studies attribute the inefficiency in the electricity industry to the ineffective  
238 management of decision-making units, as well as the fact that the generally  
239 unfavourable operating environment has been neglected. In a departure from other  
240 studies, Yang (2009) applied the DEA approach to studying coal-fired electricity plants  
241 in China and found that the unfavourable operating environments in some electricity  
242 plants resulted in relatively low-efficiency scores. The implementation of appropriate  
243 market and regulatory mechanisms could eliminate this inefficiency and bring  
244 substantial economic and environmental benefits. In order to identify the dynamic  
245 changes in total-factor carbon emission performance that have taken place, Zhang (2013)  
246 proposed using the metafrontier non-radial Malmquist CO<sub>2</sub> emission performance  
247 index (MCPI) method to estimate these changes in China's thermal electricity plants  
248 from 2005 to 2010. The study found that technological advances and changes in energy  
249 structure can have a positive influence on reducing CO<sub>2</sub> emissions.

250 Even though many studies have employed the decomposition method to  
251 investigate energy-related emissions, less attention has been paid to the linkages  
252 between energy policy and the various drivers. In this study, we apply the IO-SDA  
253 method to analyse the factors driving CO<sub>2</sub> emissions in the thermal electricity and  
254 heating sector and investigate the historical evolution of each of the drivers that

255 accompanied the implementation of the energy policies. This leads us to a different  
256 conclusion from that which has been reached by the existing studies. Related literature  
257 has mainly focused on the factors driving carbon emissions from coal-fired electricity  
258 plants before 2012. Our research spans a time period covering three five-year plans,  
259 which allows us to explore the contradiction between the policy objectives and  
260 outcomes. This helps us to explore the causes of this and ascertain what influenced the  
261 policy outcomes and the possible deviations from the policy.

262 Second, some of the related research has applied the DEA model to explore the  
263 efficiency of thermal electricity generation to assess its impact on CO<sub>2</sub> emissions. In  
264 this study, we introduce the SBM-DEA model and treat CO<sub>2</sub> emissions as an unexpected  
265 output in order to assess the energy efficiency of the thermal electricity and heating  
266 sector for 30 provinces from 2007 to 2018. By measuring the slack and redundancy of  
267 the input and output variables, this study proposes a scheme to optimise the energy  
268 structure of the thermal electricity and heating sector, which provides a valuable  
269 reference that the government can use to formulate energy structure optimisation  
270 strategies in a scientific way. In addition, this study further measures the dynamic  
271 technical efficiency within the thermal electricity and heating sector by applying the  
272 Adjacent Malmquist model, which is conducive to predicting future trends and  
273 formulating appropriate energy policies. Third, most studies have mainly focused on a  
274 single CO<sub>2</sub> emissions index and failed to comprehensively reflect the linkages between  
275 the different industrial sectors. Therefore, it is hard to assess the impact of sectoral  
276 connection and economic structural factors on carbon emissions. This paper further  
277 investigates the impact of technological progress, the energy consumption structure and  
278 economic scale among different industrial sectors on CO<sub>2</sub> emissions.

279

## 280 *2.2 Electricity demand*

281 Demand for electricity has been rising steeply in China during recent years.  
282 Increasing fluctuations in electricity demand and insufficient peak shaving (levelling  
283 out of peaks in electricity demand) capacity within the electricity supply system  
284 constitute two major problems. Analysing changes in demand for electricity within  
285 different industrial sectors can provide a reference for electricity demand forecasting,  
286 as well as useful guidance for formulating industrial electricity saving and electricity  
287 development plans and/or policies. In order to predict China's electricity demand and  
288 ensure a stable electricity supply, Paul (2016) applied a decomposition analysis method  
289 to assess the effect of changes in various industrial sectors on electricity demand from  
290 1998 to 2002. During the period from 1998 to 2007, China's industrial electricity  
291 consumption increased dramatically. In response to this, Wang (2010) applied the  
292 LMDI approach to assess the driving forces behind this growing demand for electricity,  
293 and found that the production of electricity and heat was one of the biggest contributors.  
294 They concluded that these sectors should be given priority in terms of industrial  
295 restructuring. Wang et al. (2019) applied a modified SDA model to assess the key  
296 factors accounting for the rise in CO<sub>2</sub> emissions from electricity generation in China  
297 between 2007 and 2012. He found that the increase in CO<sub>2</sub> emissions resulting from  
298 electricity generation was mainly driven by changes in electricity demand.



299 Some existing studies have investigated the effect of changes in the industrial  
300 sector on electricity demand by applying the decomposition analysis method, such as  
301 those by Paul (2016) and Wang et al. (2019), described above. However, the demand  
302 for electricity from China's industrial sector increased rapidly from 2007 to 2015,  
303 accounting for approximately 72 per cent of China's total electricity consumption  
304 (National Energy Administration, 2016). It is debatable whether the effects of the  
305 demand from the industrial sector for electricity are currently still following the same  
306 trajectory outlined by Paul (2016) and Wang (2019), as it may be that some structural  
307 adjustment to demand has occurred within the industrial sector. Thus, it is important to  
308 study the factors that contribute to demand for electricity and to decompose the drivers  
309 of carbon emissions resulting from electricity generation. In addition, this study  
310 explores how the consumption trends of various industrial sectors evolved during the  
311 period from 2007 to 2015 in order to discover which sectors had a high demand for  
312 electricity and heating. These results will help to provide policy suggestions to  
313 accelerate the optimisation of the demand structure on the consumption side and  
314 achieve the short-term goal of reducing emissions.

315

### 316 **3 Data and methodology**

#### 317 *3.1 Data sources*

318 The data used for this study are derived from China's Energy Balance tables, and  
319 the China Energy Statistical Yearbook and Input-Output (I-O) tables for 2008, 2011,  
320 2013, 2016 and 2019 (The yearbook releases data with a one-year lag, which means the  
321 2008 statistical yearbook contains data for 2007, and so on). The data consists of input  
322 and output data for 42 industrial sectors, 20 types of energy input data for the thermal  
323 power and heating departments of 30 provinces, and output data on power, heat and  
324 CO<sub>2</sub>. China is divided into four economic regions, namely the eastern, central, western  
325 and northeastern regions. Due to the availability of data, we only studied 30 provinces,  
326 which are divided as follows: Beijing, Tianjin, Hebei, Shanghai, Jiangsu, Zhejiang,  
327 Fujian, Shandong, Guangdong and Hainan belong to the eastern region; Shanxi, Anhui,  
328 Jiangxi, Henan, Hubei and Hunan are located in the central region; Inner Mongolia,  
329 Guangxi, Chongqing, Sichuan, Guizhou, Yunnan, Shaanxi, Gansu, Qinghai, Ningxia  
330 and Xinjiang belong to the western region; and Liaoning, Jilin and Heilongjiang form  
331 part of the northeastern region. We adjusted the I-O tables according to the constant  
332 price in 2007 and subtracted the imports, because these are produced abroad and  
333 therefore do not consume any of China's products and energy in the manufacturing  
334 process. The energy balance sheet provides the figures for the usage of each energy  
335 source. The conversion standard refers to the conversion coefficient published by the  
336 National Bureau of Energy Statistics. The carbon emission coefficients and the average  
337 lower heating value of each energy source refers to data published in the 2006  
338 Intergovernmental Panel on Climate Change (IPCC) report. The I-O table gives  
339 statistics for the intermediate input, final use, and total output data of each sector. We  
340 used the year 2007 as the base period and adjusted the corresponding I-O tables using  
341 the constant price in 2010, 2012, 2015 and 2018, respectively. The amount of energy

342 used in thermal electricity generation and the heating sector, for each category of energy,  
 343 is shown in Table 1. We applied the SBM-DEA model to study the optimisation of the  
 344 energy structure, and because the model has quantitative requirements regarding the  
 345 input variables, output variables and the number of decision making units, we combined  
 346 the 20 input energy sources into 4 types: namely, Total Coal; Total Petroleum Products;  
 347 Coal Gas; and Gas (the quantity selection criteria used for the variables are explained  
 348 in subsection 3.2.2).

349

350 **Table 1**

351 Energy use (unit:  $10^4$  tce ) in thermal electricity generation and heating sector.

Classification of energy	Categories of energy	2007	2010	2012	2015	2018
Total Coal	Raw Coal	101609.9	118482.8	139522.5	142869.8	165963.2
	Cleaned Coal	40.47	13.7	90.95	79.07	0
	Other Washed Coal	1301.99	1395.08	1197.24	1182.43	1871.2
	Briquettes	0	0	0	0	0
	Coke	0	0	0	273.89	20.65
	Other Coking Products	0	0	0	0	0
Total Petroleum Products	Crude Oil	23.59	9.99	17.46	27.36	21.86
	Gasoline	0.19	0.13	0.12	0.35	0.1
	Kerosene	0	0	0	0	0
	Diesel Oil	337.19	171.44	55.38	41.64	45.96
	Fuel Oil	995.83	464.62	329.19	280.93	106.67
	Refinery Gas	256.52	392.52	324.97	286.2	363.12
	Other Petroleum Products	240.74	151.91	29.3	50.34	21.38
Gas	Liquefied Natural Gas (LNG)	8.79	1.51	0.12	5.61	6.87
	Natural Gas	1226.22	2314.83	2897.87	4310.14	6388.16
	Liquefied Petroleum Gas (LPG)	0	310.09	329.69	303.93	364.72
Coal Gas	Coke Oven Gas	5476.95	10573.78	12214.61	13667.46	13638.41
	Blast Furnace Gas	0	14818.96	18469.02	26825.7	37130.04

Converter Gas	0	1793.37	3394.02	3631.54	7294.4
Other Gas	11661	0	0	228.39	86.25

352 Data source: China Energy Statistics Yearbook 2008–2019. The yearbook releases data with a one-year  
353 lag.

354

355 The conversion factors for calculating CO<sub>2</sub> emission from different types of energy  
356 are shown in Table 2.

357

358 **Table 2**

359 Conversion factors for calculating CO<sub>2</sub> emissions from different types of energy.

Categories of energy	CO <sub>2</sub> emissions per heat unit (t /10 <sup>3</sup> J)	Average lower calorific value (10 <sup>-6</sup> J/t)	CO <sub>2</sub> emission factors (t CO <sub>2</sub> /t)	Conversion coefficient to standard coal (t tec/t)
Raw Coal	97967	20908	2.4083	0.7143
Cleaned Coal	97967	26344	2.5808	0.9
Other Washed Coal	97967	8363	0.8193	0.357
Briquettes	97500	8363	0.8154	0.6
Coke	107000	28435	3.0425	0.9714
Coke Oven Gas	44400	16726(10 <sup>3</sup> J/m <sup>3</sup> )	7.4263(10 <sup>-4</sup> t/m <sup>3</sup> )	5.93
Blast Furnace Gas	260000	5227(10 <sup>3</sup> J/m <sup>3</sup> )	13.5902(10 <sup>-4</sup> t/m <sup>3</sup> )	1.286
Converter Gas	260000	5227(10 <sup>3</sup> J/m <sup>3</sup> )	13.5902(10 <sup>-4</sup> t/m <sup>3</sup> )	2.286
Other Gas	260000	5227(10 <sup>3</sup> J/m <sup>3</sup> )	13.5902(10 <sup>-4</sup> t/m <sup>3</sup> )	6.9
Other Coking Products	97500	33453	3.2617	1.3
Crude Oil	73300	41816	3.0651	1.4286
Gasoline	70000	43070	3.0149	1.4714
Kerosene	71900	43070	3.0967	1.4714
Diesel Oil	74100	42652	3.1605	1.4571
Fuel Oil	77400	41816	3.2366	1.4286
LPG	63100	50179	3.1663	1.7143
Refinery Gas	57600	46055	2.6528	1.5714
Other Petroleum Products	73300	41816	3.0651	1.2
Natural Gas	56100	38931(10 <sup>3</sup> J/m <sup>3</sup> )	21.8403(10 <sup>-4</sup> t/m <sup>3</sup> )	1.22
LNG	56100	54071	3.0334	1.7572

360 Note: The LNG data was computed using the mass and volume.

361

362 The data source, China's Energy Balance Sheet, listed 17 different energy sources  
363 for 2007 and 20 energy sources for 2012 and 2015. In order to standardise them, we  
364 classified the energy sources into 17 categories. Given the data availability, this study

365 followed the classification used by Wang et al. (2019) and merged the original 42  
 366 sectors in the I-O table into 9 sectors. Table 3 shows the descriptive statistics for various  
 367 data.

368

369 **Table 3**

370 Descriptive statistics.

	<b>Year</b>	<b>n</b>	<b>Min</b>	<b>Max</b>	<b>Mean</b>	<b>SD</b>
Total Coal (unit: 10 <sup>4</sup> tce)	2007-2018	150	104.55	20025.72	4749.00	4003.80
Total Petroleum Products (unit: 10 <sup>4</sup> tce)	2007-2018	150	0.00	818.35	32.33	77.91
Gas (unit: 10 <sup>4</sup> tce)	2007-2018	150	0.00	1634.00	128.60	259.68
Coal Gas (unit: 10 <sup>4</sup> tce)	2007-2018	150	0.00	19029.56	1877.33	2650.88
Heat (10 <sup>10</sup> kJ)	2007-2018	150	47.90	133092.95	17569.61	19984.39
Power (10 <sup>8</sup> kW•h)	2007-2018	150	83.10	5488.24	1302.24	1083.79
CO <sub>2</sub> (unit: 10 <sup>4</sup> tons)	2007-2018	150	779.07	108924.47	25994.67	21832.96

371

### 372 3.2 The Model

373 The decomposition of factors driving CO<sub>2</sub> emissions in the thermal electricity and  
 374 heating sector from 2007 to 2018 and the analysis of the internal causes are depicted in  
 375 Fig. 1. The research flow chart is divided into four steps.

376 First, we collected relevant data from 30 provinces and 42 industrial sectors for  
 377 the period 2007-2018. This consisted of the annual consumption figures for 20 types of  
 378 energy use, heat, power generation and CO<sub>2</sub> emissions from thermal power and heating  
 379 sector for 30 Chinese provinces, and the I-O data for all 42 industrial sectors from the  
 380 I-O tables. For modelling purposes, the different types of energy use are regarded as the  
 381 inputs, while heat, power generation and CO<sub>2</sub> emissions are regarded as the three  
 382 outputs, of which CO<sub>2</sub> emissions are treated as the undesirable output.


383 Second, the IO-SDA model was introduced to decompose the factors driving CO<sub>2</sub>  
 384 emissions into four types, namely: energy structure; energy intensity; input-output  
 385 structure; and the demand for electricity and heating. Subsequently, the contribution of  
 386 each driver to the thermal electricity and heating sector, and its evolutionary trend, were  
 387 examined.

388 Third, the SBM-DEA model and Adjacent Malmquist model were constructed to  
 389 evaluate the energy efficiency (to help us assess how the energy structure can be  
 390 optimised) and technical value (to help us assess the effect of the input-output structure)  
 391 for each of the provinces, respectively. The slack variables of various provinces, and  
 392 the possible reasons behind the adynamic change in energy efficiency and technical  
 393 value were then analysed. Based on the analysis of the slack variables, this study  
 394 provides energy structure optimisation schemes for the thermal electricity and heating  
 395 sector. In addition, changes in CO<sub>2</sub> emissions resulting from technological upgrading

396 were also measured using the Adjacent Malmquist model. The study then evaluated the  
 397 energy intensity in different regions to assess the contribution of the final demand in  
 398 each sector to CO<sub>2</sub> emissions in order to further analyse the energy intensity effect and  
 399 the final demand effect.

400 Finally, this study uncovered the key drivers of CO<sub>2</sub> emissions, as well as  
 401 analysing the internal causes of changes in each driver and assessing the impact of  
 402 energy policy on each driver. Some suggestions for optimising the energy structure,  
 403 improving the energy intensity, increasing technical emissions reduction, and policy  
 404 implications are then provided based on the experimental results.

405

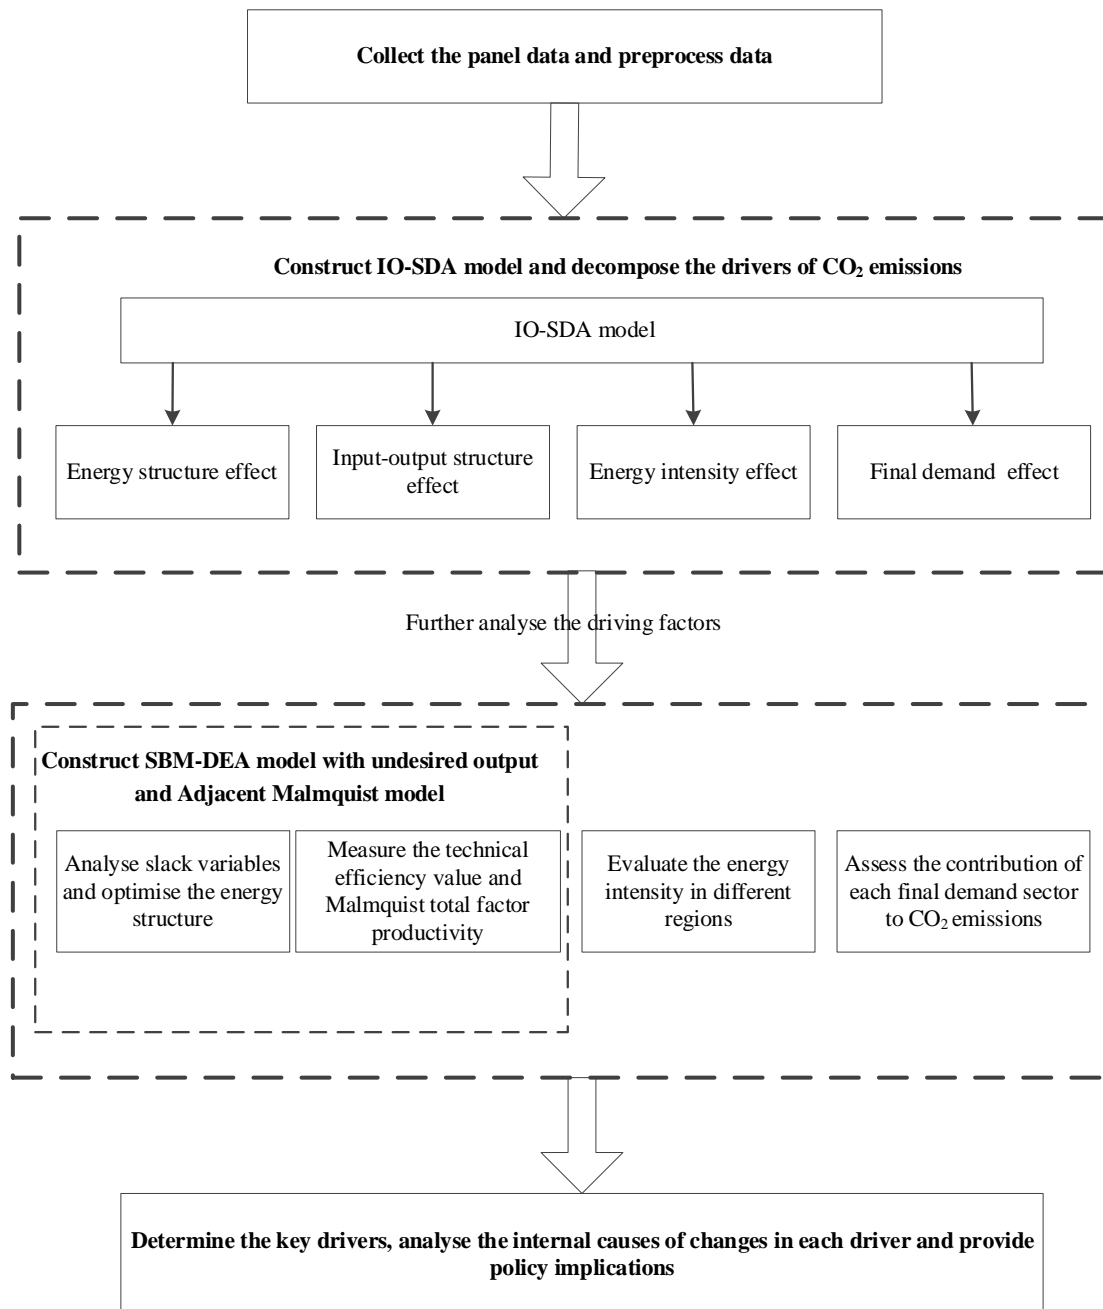

406

407

408

**Fig. 1.** Flow chart of the research process

409 3.2.1 I-O SDA model

410 The I-O tables reveal the complex interdependencies between different economic  
 411 sectors, as well as showing how commodity production and commodity exchange are  
 412 linked. I-O tables are therefore widely used to measure direct and indirect CO<sub>2</sub>  
 413 emissions in various sectors. For the I-O table, the direct consumption coefficient  
 414 matrix A can be set as:

$$415 \quad A = [a_{ij}], a_{ij} = \frac{Z_{ij}}{Z_j} \quad (1)$$

416 where  $Z_{ij}$  refers to the intermediate input from sector  $i$  to sector  $j$ ,  $i=1,2,\dots,n$ ,  
 417  $j=1,2,\dots,n$ .  $Z = [z_i]$  represents the total output of sector  $i$ .  $Y = [y_i]$  denotes the final  
 418 demand from sector  $i$ . The total output vector can then be expressed as:

$$419 \quad \begin{pmatrix} z_1 \\ z_2 \\ \vdots \\ z_n \end{pmatrix} = \begin{pmatrix} a_{11} & a_{12} & \cdots & a_{1n} \\ a_{21} & a_{22} & \cdots & a_{2n} \\ \vdots & \vdots & \ddots & \vdots \\ a_{n1} & a_{n2} & \cdots & a_{nn} \end{pmatrix} \begin{pmatrix} z_1 \\ z_2 \\ \vdots \\ z_n \end{pmatrix} + \begin{pmatrix} y_1 \\ y_2 \\ \vdots \\ y_n \end{pmatrix} \quad (2)$$

420 Formula (2) can be transformed into:

$$421 \quad AZ + Y = Z \quad (3)$$

422 Then, equation (3) can be simplified as:

$$423 \quad Z = (I - A)^{-1} Y \quad (4)$$

424 where  $I$  represents the identity matrix and  $L = (I - A)^{-1}$  represents Leontief's inverse  
 425 matrix. In sector  $i$ , the CO<sub>2</sub> generated by consuming the energy source  $k$  can be  
 426 calculated as:

$$427 \quad E_{ik} = f_k \times C_{ik} = \frac{E_{ik}}{C_{ik}} \times C_{ik}, i=1,2,\dots,n, k=1,2,\dots,m. \quad (5)$$

428 where  $f_k$  denotes the CO<sub>2</sub> emission coefficient of energy source  $k$  and  $C_{ik}$   
 429 represents the amount of energy combustion of energy source  $k$ ,  $k=1,2,\dots,m$ .

430 The CO<sub>2</sub> emission coefficient of energy source  $k$  is computed as follows:

$$431 \quad f_k = T_k \times Q_k \quad (6)$$

432 where  $T_k$  is the amount of CO<sub>2</sub> emissions per unit of heat produced by

433 combusting the energy source  $k$ ;  $Q_k$  is the average lower heating value of energy  
 434 source  $k$ . The values of  $T_k$  and  $Q_k$  were obtained from the IPCC (2006). In order to  
 435 explore the impacts of the energy structure, energy intensity, the input-output structure  
 436 and final demand on CO<sub>2</sub> emissions, we transformed  $C_{ik}$  from formula (5) into

437  $C_{ik} = \frac{C_{ik}}{C_i} \times \frac{C_i}{X_i} \times X_i$  and obtained the following:

$$438 \quad E_{ik} = \frac{E_{ik}}{C_{ik}} \times \frac{C_{ik}}{C_i} \times \frac{C_i}{Z_i} \times (I - A)^{-1} Y_i, i = 1, 2, \dots, n, k = 1, 2, \dots, m \quad (7)$$

439 where  $F = \frac{E_{ik}}{C_{ik}}$  denotes the CO<sub>2</sub> emission coefficient matrix and  $F_{n \times m} = (f_1 \ f_2 \ \dots \ f_m)$ .

440  $S_{m \times n} = [s_{ik}]$ ,  $s_{ik} = \frac{C_{ik}}{C_i}$  represents the energy consumption structure matrix.  $I_{n \times n} = \frac{C_i}{Z_i}$  is

441 the energy intensity matrix.  $L_{n \times n} = (I - A)^{-1}$  represents the effect of the input-output  
 442 structure on total CO<sub>2</sub> emissions, which reflects the contribution of technological  
 443 improvements to CO<sub>2</sub> emissions in the production process.  $Y = (y_1, y_2, \dots, y_n)^{-1}$  denotes  
 444 the final demand matrix, reflecting the impact of the demand for the final product on  
 445 total CO<sub>2</sub> emissions.

446 The energy consumption structure matrix  $S$  and the energy consumption intensity  
 447 matrix  $I$  can be expressed as:

$$448 \quad S_{m \times n} = \begin{pmatrix} \frac{C_{11}}{\sum_{k=1}^m C_{1k}} & \frac{C_{12}}{\sum_{k=1}^m C_{1k}} & \dots & \frac{C_{1n}}{\sum_{k=1}^m C_{1k}} \\ \frac{C_{21}}{\sum_{k=1}^m C_{2k}} & \frac{C_{22}}{\sum_{k=1}^m C_{2k}} & \dots & \frac{C_{2n}}{\sum_{k=1}^m C_{2k}} \\ \vdots & \vdots & \ddots & \vdots \\ \frac{C_{m1}}{\sum_{k=1}^m C_{ik}} & \frac{C_{m2}}{\sum_{k=1}^m C_{ik}} & \dots & \frac{C_{mn}}{\sum_{k=1}^m C_{ik}} \end{pmatrix}, \quad I_{n \times n} = \begin{pmatrix} \frac{\sum_{k=1}^m C_{1k}}{X_1} & 0 & \dots & 0 \\ 0 & \frac{\sum_{k=1}^m C_{2k}}{X_2} & \dots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \dots & \frac{\sum_{k=1}^m C_{nk}}{X_n} \end{pmatrix} \quad (8)$$

449 where  $C_{ik}$  denotes sector  $i$ 's demand for energy source  $k$ .

450 By calculating the sum of the CO<sub>2</sub> emissions produced from the  $m$  energy  
 451 sources consumed by sector  $i$ , we can obtain the total amount of CO<sub>2</sub> emitted by sector  
 452  $i$ :

453 
$$E_i = \sum_{k=1}^m E_{ik} \quad (9)$$

454 The total amount of CO<sub>2</sub> emissions from the thermal and heating sector can then  
 455 be established by combining equation (7) and equation (9):

456 
$$E_h = \sum_{k=1}^m \frac{E_{hk}}{C_{hk}} \times \frac{C_{hk}}{C_h} \times \frac{C_h}{X_h} \times (I-A)^{-1} Y_h = FSILY \quad (10)$$

457 According to equation (10), the changes in CO<sub>2</sub> emissions from the thermal  
 458 electricity and heating sector in two adjacent periods  $\Delta E_h$  can be expressed as follows:

459 
$$\Delta E_h = F_t S_t I_t L_t Y_t - F_{t-1} S_{t-1} I_{t-1} L_{t-1} Y_{t-1} \quad (11)$$

460 The SDA method can involve many different forms of decomposition. In order to  
 461 reduce the errors, this study uses bipolar decomposition to decompose the total amount  
 462 of CO<sub>2</sub> emitted by the thermoelectric and heating sector. More detail about the SDA  
 463 decomposition method can be found in the following references: Dietzenbacher and  
 464 Los (1998); Haan (2001); Hoekstra and Bergh (2002); Liang et al. (2013); and Rørmoose  
 465 and Olsen (2005).

466 
$$\begin{aligned} \Delta E_h = & \underbrace{\frac{(F_t + F_{t-1})(I_t + I_{t-1})(L_t + L_{t-1})(Y_t + Y_{t-1})}{2^4} \Delta S}_{\text{energy structure effect}} \\ & + \underbrace{\frac{(F_t + F_{t-1})(S_t + S_{t-1})(L_t + L_{t-1})(Y_t + Y_{t-1})}{2^4} \Delta I}_{\text{energy intensity effect}} \\ & + \underbrace{\frac{(F_t + F_{t-1})(S_t + S_{t-1})(I_t + I_{t-1})(Y_t + Y_{t-1})}{2^4} \Delta L}_{\text{input-output structure effect}} \\ & + \underbrace{\frac{(F_t + F_{t-1})(S_t + S_{t-1})(I_t + I_{t-1})(L_t + L_{t-1})}{2^4} \Delta Y}_{\text{final demand effect}} \end{aligned} \quad (12)$$

467 The formula for calculating changes in the total amount of CO<sub>2</sub> emissions  
 468 produced by the thermal electricity and heating sector can be rewritten as follows:

469 
$$\Delta E_h = \Delta E_S + \Delta E_I + \Delta E_L + \Delta E_Y \quad (13)$$

470 where  $\Delta E_S = \frac{(F_t + F_{t-1})(I_t + I_{t-1})(L_t + L_{t-1})(Y_t + Y_{t-1})}{2^4} \Delta S$ ,  $\Delta E_I = \frac{(F_t + F_{t-1})(S_t + S_{t-1})(L_t + L_{t-1})(Y_t + Y_{t-1})}{2^4} \Delta I$

471  $\Delta E_L = \frac{(F_t + F_{t-1})(S_t + S_{t-1})(I_t + I_{t-1})(Y_t + Y_{t-1})}{2^4} \Delta L$ ,  $\Delta E_Y = \frac{(F_t + F_{t-1})(S_t + S_{t-1})(I_t + I_{t-1})(L_t + L_{t-1})}{2^4} \Delta Y$

472  $\Delta E_S$  denotes the changes in total CO<sub>2</sub> emissions caused by changes in energy structure.



473  $\Delta E_I$  represents the changes in total CO<sub>2</sub> emissions due to changes in energy intensity.

474  $\Delta E_L$  represents the changes in total CO<sub>2</sub> emissions caused by changes in the

475 intermediate input-output structure. Lastly,  $\Delta E_Y$  denotes the changes in total CO<sub>2</sub>

476 emissions caused by changes in the final demand. In order to further evaluate the impact

477 of energy structure adjustment and changes in final demand on CO<sub>2</sub> emissions reduction,

478 we decomposed the energy structure effect and final demand effect, as follows:

$$479 \quad SE_k = \frac{(F_t + F_{t-1})\Delta S_k(I_t + I_{t-1})(L_t + L_{t-1})(Y_t + Y_{t-1})}{2^4} \quad (14)$$

$$480 \quad FDE_i = \frac{(F_t + F_{t-1})(S_t + S_{t-1})(I_t + I_{t-1})(L_t + L_{t-1})}{2^4} \Delta Y_i \quad (15)$$

481 where  $\Delta S_k$  represents the changes in the consumption of energy source  $k$

482 between two periods, and  $\Delta Y_i$  denotes the output changes in sector  $j$  between two

483 periods.  $SE_k$  is the contribution made to reducing emissions by each energy source in

484 terms of the energy structure effect and  $\sum_{k=1}^m SE_k = \Delta E_S$ .  $FDE_j$  represents the impact

485 of changes in the demand scale of industry  $i$  on the final demand.  $\sum_{i=1}^n FDE_i = \Delta E_Y$

486 denotes the final demand effect.

### 487 3.2.2 SBM-DEA model with undesirable output

488 In order to further evaluate the energy structure optimisation approach and

489 measure the energy efficiency of the thermal electricity and heating sector, the SBM-

490 DEA model was innovatively applied to estimate the slack variables and technical

491 efficiency. DEA is suitable for dealing with production activities with multi-inputs and

492 multi-outputs of Decision Making Units (DMU), and has been widely used to evaluate

493 the relative efficiency of DMU (Cong et al., 2021; Zhang et al., 2021). The principle

494 that DEA works on is to determine the relatively effective frontier of DMU by using

495 linear programming and convex analysis methods on the basis of keeping the input or

496 output unchanged, and then projecting each DMU onto the production frontier. The

497 relatively effective frontier of DMU represents the top surface of a convex polyhedron

498 which composed of productive effective points in all DUMs. Efficient point falls on the

499 frontier and its efficiency value is 1; invalid points are surrounded by the frontier, and

500 the efficiency value is between 0 and 1. The relative effectiveness of DMU was

501 evaluated by comparing the degree of deviation from the DEA frontier.

502 However, traditionally DEA uses either the radial or angular measurement method.

503 The radial method often ignores the slack problem and thus the efficiency value of the  
 504 production unit may be overestimated (Han et al., 2020; Cong et al., 2021). The angular  
 505 method tends to bias the efficiency measurement results of the production units. In order  
 506 to avoid any measurement errors caused by the shortcomings of the aforementioned  
 507 two methods, Tone (2001) proposed a non-angular and non-radial SBM model. Both  
 508 the SBM and CCR model are based on the constant return to scale principle. Unlike  
 509 traditional DEA, the SBM-DEA can evaluate the efficiency values from both the input  
 510 and output perspectives (Sun and Huang, 2021).

511 Based on Tone's (2001) method, we assumed that there are  $k$  DMUs. Each DMU  
 512 has  $m$  input factors and  $n$  output factors,  $X = (x_{ij}) \in \mathbf{R}^{m \times k}$  denotes the input matrix  
 513 and  $Y = (y_{ij}) \in \mathbf{R}^{n \times k}$  represents the output matrix. The possible production set can be  
 514 defined as  $P = \{(x, y) | x \geq X\lambda, y \leq Y\lambda, \lambda \geq \mathbf{0}\}$ , where  $\lambda$  is the non-negative weight  
 515 vector on the real set  $\mathbf{R}^k$ ,  $X\lambda$  and  $Y\lambda$  denotes the input and output values on the  
 516 frontier. For a particular  $DMU_0(x_0, y_0)$ , the efficiency value of  $DMU_0(x_0, y_0)$  can  
 517 be evaluated by using the following SBM-DEA model:

$$518 \quad \rho^* = \min \frac{1 - \frac{1}{m} \sum_{i=1}^m \frac{s_i^-}{x_{i0}}}{1 + \frac{1}{n} \sum_{r=1}^n \frac{s_r^+}{y_{r0}}} \quad (16)$$

$$s.t. \begin{cases} \mathbf{x}_0 = X\lambda + \mathbf{s}^- \\ \mathbf{y}_0 = Y\lambda - \mathbf{s}^+ \\ \lambda, \mathbf{s}^-, \mathbf{s}^+ \geq \mathbf{0} \end{cases}$$

519 where  $\rho^*$  denotes the efficiency value of  $DMU_0(x_0, y_0)$  and  $\sum \lambda = 1$ .  $\mathbf{s}^- \in \mathbf{R}^m$   
 520 represents the slack variable for  $m$  desirable inputs, and  $s_i^-$  denotes the redundancy of  
 521 the  $i$ th input.  $\mathbf{s}^+ \in \mathbf{R}^n$  represents the slack variable for  $n$  outputs, and  $s_r^+$  denotes the  
 522 deficiency of the  $r$ th output.

523 Thermal power plants produce not only desired electricity and heat, but also  
 524 undesired outputs such as  $CO_2$ . In order to measure the energy efficiency and technical  
 525 efficiency more accurately, the undesirable outputs are taken into consideration. Based  
 526 on the above model, the updated SBM-DEA model with undesirable outputs can be  
 527 shown as follows:

$$\min \rho = \frac{1 - \frac{1}{m} \sum_{i=1}^m \frac{s_i^-}{x_{i0}}}{1 + \frac{1}{n_1 + n_2} \left( \sum_{r=1}^{n_1} \frac{s_r^{e+}}{y_{r0}^e} + \sum_{j=1}^{n_2} \frac{s_j^{u+}}{y_{j0}^u} \right)}$$

$$s.t. \begin{cases} \mathbf{x}_0 = X \boldsymbol{\lambda} + \mathbf{s}^- \\ \mathbf{y}_0^e = Y^e \boldsymbol{\lambda} - \mathbf{s}^{e+} \\ \mathbf{y}_0^u = Y^u \boldsymbol{\lambda} + \mathbf{s}^{u+} \\ \boldsymbol{\lambda}, \mathbf{s}^-, \mathbf{s}^{e+}, \mathbf{s}^{u+} \geq 0 \end{cases} \quad (17)$$

528

529 where  $\rho, \mathbf{s}^-, \mathbf{s}^{e+}, \mathbf{s}^{u+}$  represents the efficiency value, input redundancy, desirable

530 output deficiency and undesirable output redundancy, respectively.  $DMU_0(x_0, y_0)$  is

531 valid only when  $\rho$  is equal to 1. At this point,  $\mathbf{s}^- = 0, \mathbf{s}^{e+} = 0$  and  $\mathbf{s}^{u+} = 0$ . If  $\rho < 1$ , the

532  $DMU_0(x_0, y_0)$  is invalid and the input and output need to be further optimised.

533 Although the non-parametric analysis method requires a smaller quantity of DMU  
534 than the parametric method, if the number of DMU is less than that of the input-output  
535 index ( $k < m + n$ ), the results are likely to indicate that most or even all the DMUs are  
536 effective, and thus the model's evaluative ability will be compromised. Generally  
537 speaking, the number of DMU should not be less than the product of the number of  
538 input and output indicators, and not less than 3 times the number of input and output  
539 indicators (Cooper et al., 2007) (see formula (18)). In terms of the model's practical  
540 application, the data availability and DEA analysis results should be taken into  
541 consideration when deciding how many DMUs to select. If the model has insufficient  
542 ability to differentiate, the input or output indicators should be reduced according to the  
543 actual situation to improve the degree of differentiation.


$$544 \quad k \geq \max \{m \times n, 3 \times (m + n)\} \quad (18)$$

### 545 3.2.3 Adjacent Malmquist model

546 Since Tone (2001) proposed an improved SBM model which included an  
547 undesirable output, this model has been widely applied in the evaluation of economic  
548 development efficiency and energy efficiency, etc., for example: sustainability  
549 efficiency evaluation (Jiang et al., 2021), and energy efficiency (Rao et al., 2012),  
550 energy structure optimisation (Sun and Huang, 2021), energy supply efficiency (Cong  
551 et al., 2021). Traditional DEA models, such as the Constant Return to Scale (CRS)  
552 model, Variable Return to Scale (VRS) model, and SBM model, only evaluate the  
553 technical efficiency at a specific time based on sectional data.

554 However, technical efficiency is a long-term process which changes continually  
555 over time. When the evaluated DMU data is panel data that includes multiple points in

556 time, the results obtained using the traditional DEA evaluation method would be  
 557 unrealistic, because they are likely to ignore the time effect and the changes in the  
 558 common frontier. In order to solve the problems associated with analysing panel data  
 559 and evaluate the dynamic changes in productivity, the Malmquist total factor  
 560 productivity index analysis method can be used. In our study, the Adjacent Malmquist  
 561 model is introduced to calculate the dynamic technical value for the thermal electricity  
 562 and heating sector from 2007 to 2018. To demonstrate the principle behind the  
 563 Malmquist total factor productivity index, we take the input-oriented CRS model as an  
 564 example (see Fig. 2).

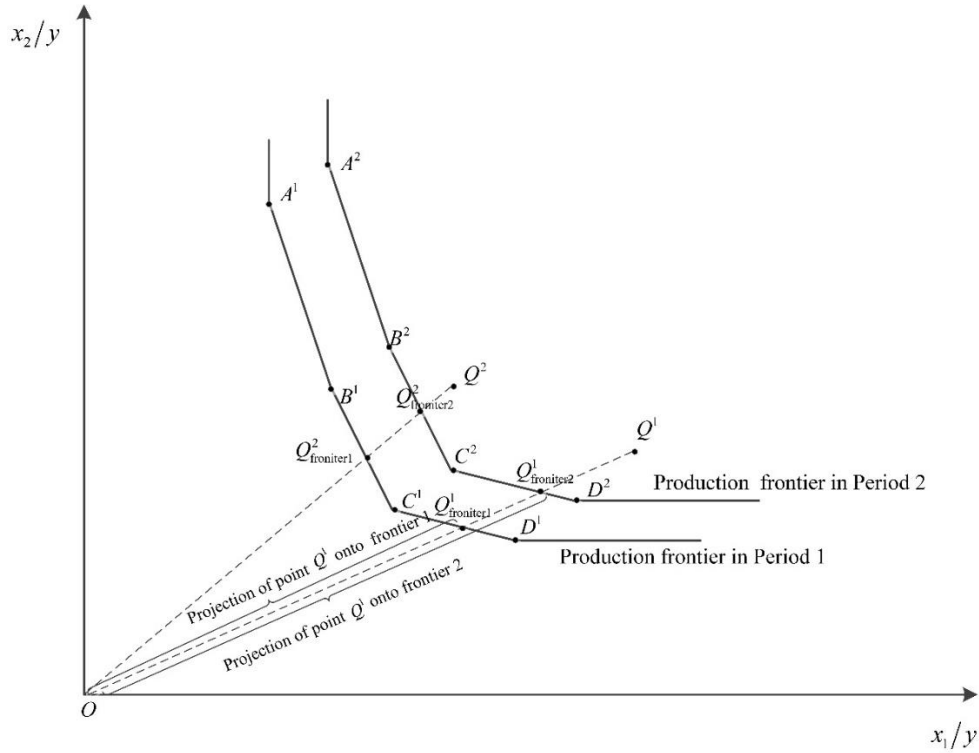

565

**Fig. 2** Malmquist productivity index diagram (input-oriented CRS)

566

567 We assumed that subscript 1 and subscript 2 represent the data for  $Q$  in period 1  
 568 and period 2, respectively. The frontier of period 1 is composed of  $A^1B^1C^1D^1$ , and the  
 569 frontier of period 2 is composed of  $A^2B^2C^2D^2$ . For a particular  $DMU_0(x_0, y_0)$ , the  
 570 productivity changes in the two periods depend on and vary with the production frontier.  
 571 Taking production frontier 1 as the benchmark, the Malmquist productivity index of  $Q$   
 572 is:

$$573 \quad M^1(Q^2, Q^1) = \frac{E^1(Q^2)}{E^1(Q^1)} = \frac{OQ_{froniter1}^2 / OQ^2}{OQ_{froniter1}^1 / OQ^1} \quad (19)$$

574

575 Taking production frontier 2 as the benchmark, the Malmquist productivity index  
 576 of  $Q$  is:

577 
$$M^2(Q^2, Q^1) = \frac{E^2(Q^2)}{E^2(Q^1)} = \frac{OQ_{\text{froniter2}}^2 / OQ^2}{OQ_{\text{froniter2}}^1 / OQ^1} \quad (20)$$

578 Thus, two different Malmquist productivity indices of  $Q$  are produced by referring  
 579 to frontier 1 and frontier 2, respectively. Based on the method proposed by Caves et al.  
 580 (1982), Fare et al. (1992) used the geometric average of the two Malmquist indices as  
 581 the Malmquist productivity index of the evaluated DMU, i.e.:

582 
$$M(Q^2, Q^1) = \sqrt{\frac{E^1(Q^2)}{E^1(Q^1)} \frac{E^2(Q^2)}{E^2(Q^1)}} = \sqrt{\frac{OQ_{\text{froniter1}}^2 / OQ^2}{OQ_{\text{froniter1}}^1 / OQ^1} \frac{OQ_{\text{froniter2}}^2 / OQ^2}{OQ_{\text{froniter2}}^1 / OQ^1}} \quad (21)$$

583

584 So, the Malmquist productivity index of  $DMU_0(x_0, y_0)$  from period  $t$  to  $t+1$   
 585 can be expressed as:


586 
$$M(x_0^{t+1}, y_0^{t+1}, x_0^t, y_0^t) = \sqrt{\frac{E^t(x_0^{t+1}, y_0^{t+1})}{E^t(x_0^t, y_0^t)} \frac{E^{t+1}(x_0^{t+1}, y_0^{t+1})}{E^{t+1}(x_0^t, y_0^t)}} \quad (22)$$

## 587 4 Results

### 588 4.1 Decomposition analysis of CO<sub>2</sub> emissions from thermal electricity and heating 589 sector

590 Fig. 3 shows the impact of the four factors on CO<sub>2</sub> emissions in China's thermal  
 591 electricity and heating sector from 2007 to 2018. These four factors have different  
 592 effects on CO<sub>2</sub> emissions at different stages. Overall, the final demand effect was  
 593 responsible for the majority of the growth in CO<sub>2</sub> emissions; the figure increased by  
 594 6.835 billion tons from 2007 to 2018. The energy intensity effect increased CO<sub>2</sub>  
 595 emissions by 115 million tons, accounting for 3.64 per cent of the total effect. However,  
 596 the energy structure effect and the input-output structure effect helped to reduce  
 597 emissions, with the input-output structure effect making the greatest contribution to  
 598 reducing carbon emissions resulting from energy production in China. It reduced CO<sub>2</sub>  
 599 emissions from energy production by 3.834 billion tons, which accounts for 107.14 per  
 600 cent of the total effect. Meanwhile, the energy structure effect had a weaker impact on  
 601 reducing emissions, with a reduction of 452 million tons, accounting for 14.3 per cent  
 602 of the total.

603

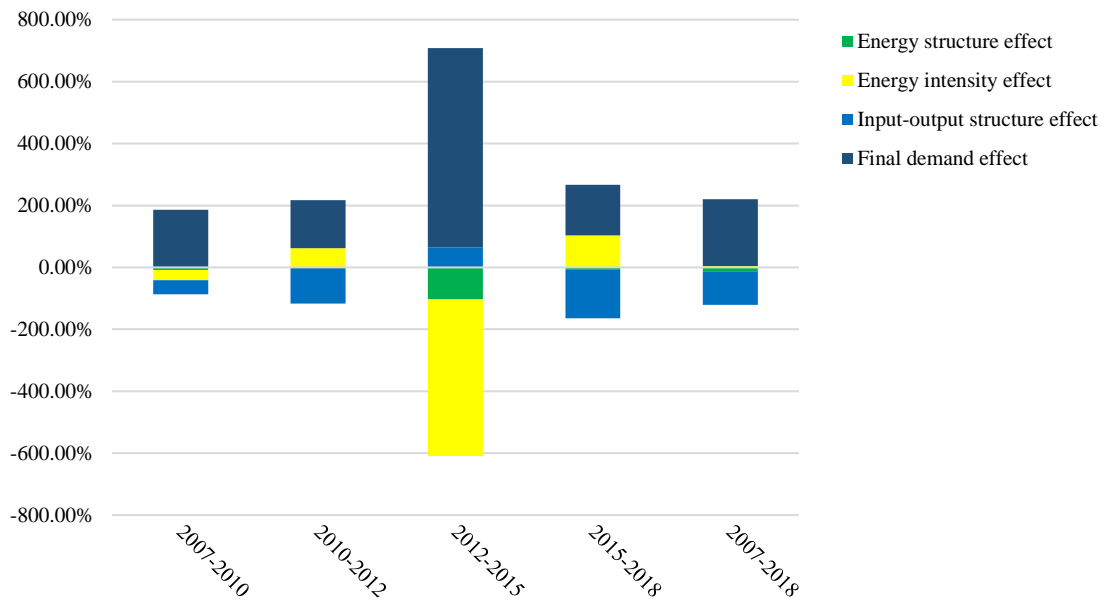

604

605 **Fig. 3.** Contribution of four factors to changes in CO<sub>2</sub> emissions during the period 2007-2018

606


607 The energy intensity effect can be optimised by improving the efficiency of energy  
 608 utilisation, which involves adapting the industrial structure and introducing  
 609 technological innovation. The input-output structure effect is a reflection of  
 610 technological progress. In terms of the long-term reduction in emissions, reducing the  
 611 intensity of energy consumption, and optimising the input-output structure both play an  
 612 important part. In the short term, controlling the final demand and optimising the energy  
 613 structure are effective ways of achieving a reduction in emissions. In the next sections,  
 614 we further analyse the mechanisms through which the energy intensity effect and the  
 615 final demand effect operate to reduce carbon emissions.

#### 616 *4.2 Analysis of the mechanisms by which the four factors reduce emissions*

617 In this subsection, we analyse the emission reduction mechanisms used by the four  
 618 drivers of change in relation to the thermal power and heating sector. Based on the  
 619 research findings, we put forward corresponding policy recommendations.

##### 620 *4.2.1 Analysis of the emission reduction mechanism of the energy intensity effect*

621 Our results show that, overall, the energy intensity effect increased CO<sub>2</sub> emissions  
 622 from 2007 to 2018. However, the energy intensity effect declined from 2007 to 2015,  
 623 although there was an increase between 2010 and 2012 (see Fig. 4). This implies that  
 624 the energy policy applied to the thermal power and heating sector during the 12<sup>th</sup> period  
 625 of the five-year plan (2011-2015) had a generally positive effect on reducing emissions,  
 626 but in specific years, the energy intensity deviated from the policy target, which is also  
 627 proved by the energy intensity coefficient shown in Fig. 5.

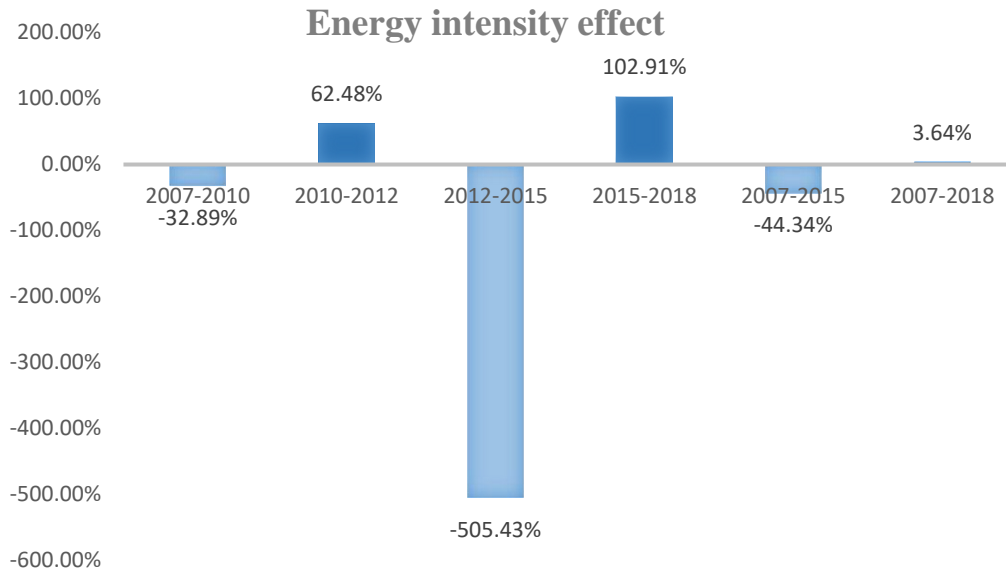

628


629 *Note:* The dark blue represents increments in emissions, the light blue represents  
 630 reductions in emissions (similarly hereafter).

631

**Fig. 4.** Energy intensity effect during the period 2007-2018

632

633

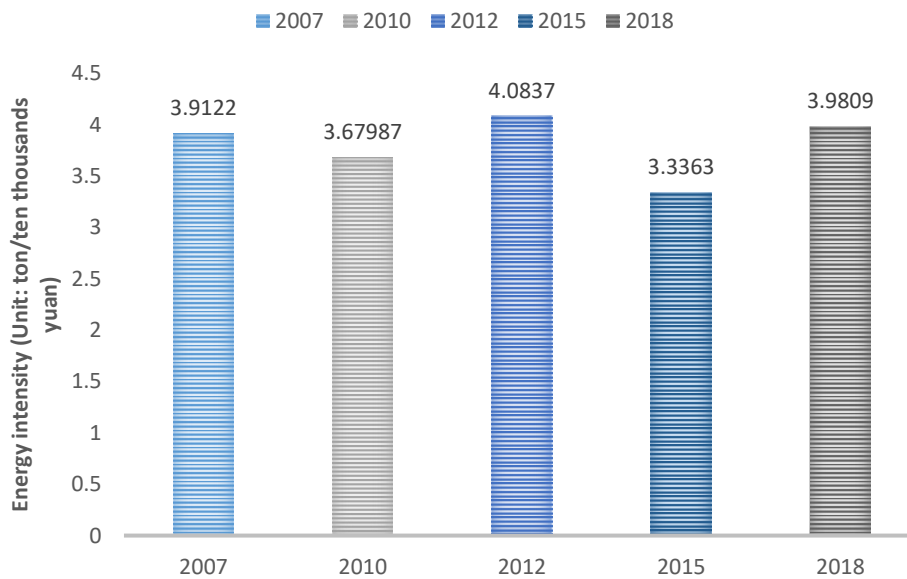

634

635 **Fig. 5.** Energy intensity coefficient of thermal electricity and heating sector during the  
 636 period 2007-2018

637


638 During the 11<sup>th</sup> period of the five-year plan (2006-2010), the Chinese government  
 639 set a mandatory target of reducing energy intensity by 20%. Both the decline in carbon  
 640 intensity and the reduction in emissions confirmed the effectiveness of the energy

641 policies. During the 12<sup>th</sup> period of the five-year plan, the government introduced a more  
642 stringent mechanism for controlling the total energy consumption, and set carbon  
643 intensity targets for each province. Overall, these policies achieved their goals; however,  
644 it is worth considering why the period from 2010 to 2012 witnessed a deviation from  
645 the generally positive trend. Moreover, Fig. 4 and Fig. 5 show that the energy intensity  
646 coefficient and its effect on emissions increased significantly during the 13<sup>th</sup> period of  
647 the five-year plan (2016-2020), which implies that the energy intensity of the thermal  
648 power sector did not fulfil the policy expectations.

649 As mentioned above, it is noteworthy that the energy intensity of China's thermal  
650 electricity and heating sector increased between 2010 and 2012, thereby offsetting most  
651 of the beneficial effects of the policy. Identifying the causes of this reversal can help to  
652 provide guidance for formulating more effective energy policies in the future. From the  
653 analysis of relevant data, we found the following possible explanations: First,  
654 consumption of raw coal during the three periods under study was 16.87, 21.04 and  
655 3.35 million tons, respectively. Compared to the period from 2007 to 2010, the amount  
656 of low-carbon energy used, such as natural gas, fell by half, while the amount of  
657 liquefied natural gas dropped by 93.5 per cent during the period from 2010 to 2012.  
658 Therefore, the dramatic increase in the use of raw coal and the sharp decline in low-  
659 carbon energy use were the major factors that led to the significant increase in energy  
660 intensity between 2010 and 2012. From 2012 to 2015, the country began to vigorously  
661 promote the policy of clean energy substitution, and the use of raw coal was  
662 significantly reduced to only 16 per cent of the total for the preceding period, while the  
663 use of low-carbon energy increased threefold compared with that of the period from  
664 2010 to 2012. Second, during the 11<sup>th</sup> period of the five-year plan (2006-2010), the  
665 Chinese government set a mandatory target of reducing energy intensity by 20 percent  
666 from the 2005 level. During this period, inefficient and technologically backward small  
667 thermal electricity units were forced to close. This policy improved the energy  
668 efficiency of the thermal electricity sector, which saw a reduction in carbon emissions  
669 of 1.74 billion tons from 2005 to 2010. Moreover, as a result of the global financial  
670 crisis in 2008, China's economic growth slowed down from 2008 to 2009, and the  
671 growth rate of primary energy consumption dropped sharply. This also reduced the  
672 energy intensity in the thermal electricity sector to a certain extent.

673 In order to analyse the causes of changes in energy intensity in more detail, we  
674 calculated the energy intensity values of the thermal electricity and heating sector for  
675 30 provinces from 2007 to 2018. As the annual output values of the thermal electricity  
676 and heating sector for some of the provinces are not released in the Statistical Yearbook,  
677 we used the measure of CO<sub>2</sub> emissions per unit of power generation to approximate the  
678 energy intensity values. The results are shown in Fig. 6 and Table 4.



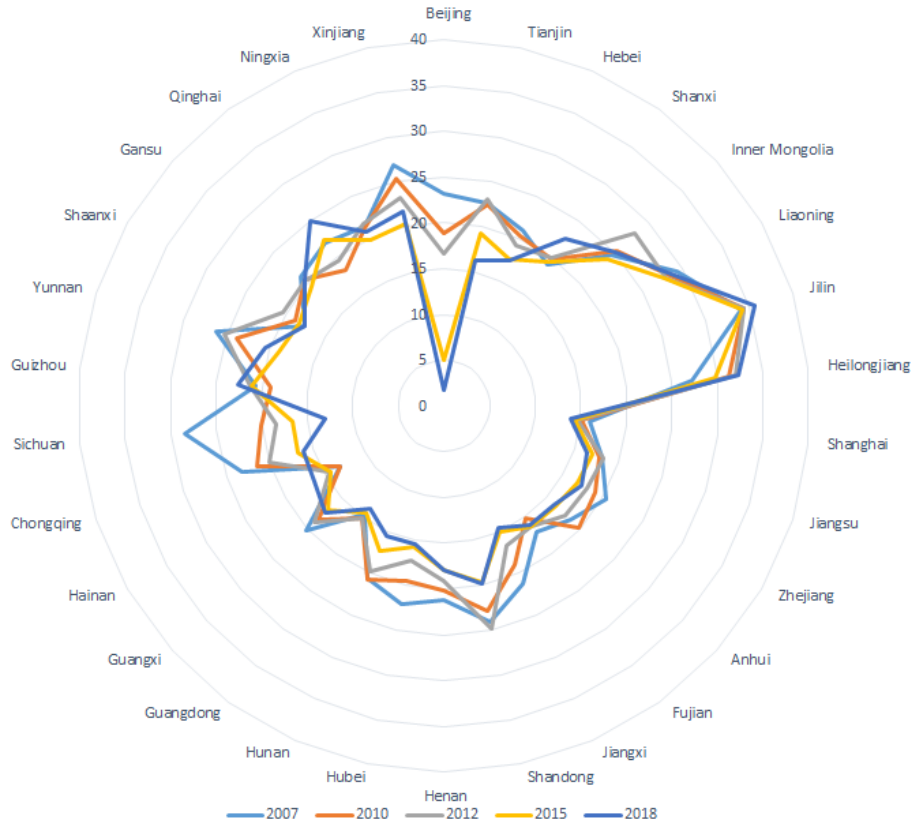

679

680 **Fig. 6.** CO<sub>2</sub> emissions per unit of electricity generated in the thermal electricity and  
 681 heating sector for 30 provinces during the period 2007-2018 (unit: 10<sup>4</sup>t / 10<sup>8</sup> kW·h )

682 Fig. 6 shows that, apart from Hainan province, the CO<sub>2</sub> emissions per unit of  
 683 electricity generated by the thermal electricity and heating sector in Beijing, Tianjin,  
 684 Hebei, Shanghai, Jiangsu, Zhejiang, Fujian, Shandong, Guangdong (most of the eastern  
 685 region) followed a downward trend from 2007 to 2018, and the average rate of decline  
 686 for these provinces was 22.8 percent. In the eastern region, Beijing experienced the  
 687 biggest drop of 92.24 percent. In the central region, Shanxi's CO<sub>2</sub> emissions per unit  
 688 of electricity rose by 17.6 percent from 2007 to 2018. In the northeastern region, the  
 689 CO<sub>2</sub> emissions per unit of electricity generated by Liaoning, Jilin and Heilongjiang  
 690 were much higher than those of the other provinces. More specifically, Jilin and  
 691 Heilongjiang's emissions increased from 34.16 and 27.19 to 35.65 and 32.39,  
 692 respectively. The CO<sub>2</sub> emissions per unit of electricity of these two provinces increased  
 693 by 4.36 percent and 19.15 percent, respectively, between 2007 and 2018. In terms of  
 694 the western region, Inner Mongolia, Guizhou, Shanxi and Qinghai showed an upward  
 695 trend, while the other provinces saw an average decline of 18.78 percent, and Sichuan  
 696 experienced the most dramatic decline of 54 percent.

697 From an overall regional perspective, the CO<sub>2</sub> emissions per unit of electricity  
 698 generated by the thermal electricity and heating sector in the northeastern region were  
 699 much higher than those of the other regions during the period 2007-2018 (see Table 4).  
 700 The western region produced the second highest level of CO<sub>2</sub> emissions per unit of  
 701 electricity, which was higher than the national average level during the same period.

702 The central and eastern regions ranked third and fourth, respectively, meaning that they  
703 produced less than the national average level during the same period..

704

705 **Table 4**

706 CO<sub>2</sub> emissions per unit of electricity generated in the thermal electricity and heating sector during the  
707 period 2007-2018 (unit: 10<sup>4</sup>t / 10<sup>8</sup> kW•h )

Region	2007	2010	2012	2015	2018
Eastern region	19.41	18.66	18.85	16.95	16.69
Central region	20.31	19.94	18.81	17.48	17.94
Western region	22.95	21.96	23.19	20.66	21.46
Northeastern region	29.64	30.58	30.53	29.79	31.27
Whole country	21.22	20.60	20.76	18.87	19.14

708

709 From 2010 to 2012, due to the relative backwardness of the western region and a  
710 reliance on the enrichment of resources, the GDP growth of the northwestern provinces  
711 increasingly came to depend on the development of coal-related industries. With the  
712 introduction of a series of national stimulus policies after the financial crisis, economic  
713 growth began to recover, accompanied by an increase in demand for electricity. Coupled  
714 with the relatively moderate energy intensity reduction targets set for the western  
715 provinces, these provinces were unable to suppress the increase in energy supply. From  
716 2010 to 2012, the construction of coal bases within the western provinces accelerated.  
717 These coal bases comprised 10 large-scale coal enterprises with a capacity of 100  
718 million tons and 10 smaller coal enterprises with a capacity of 50 million tons, and they  
719 produced more than 90 percent of the country's total coal output. In fact, during the 11<sup>th</sup>  
720 period of the five-year plan, some of these coal bases had already started operating, and  
721 were producing a considerable yield. The unprecedented scale of coal mining has been  
722 accompanied by large-scale coal-fired electricity generation and coal-chemical projects  
723 involving high levels of energy consumption. These industrial clusters have developed  
724 rapidly in the western provinces and regions, thereby forming a so-called 'energy base'.  
725 This is also the main reason for the substantial increase in the coal consumption of  
726 thermal electricity from 2010 to 2012. Table 4 shows that the CO<sub>2</sub> emissions per unit  
727 of electricity rose from 21.96 in 2010 to 23.19 in 2012, which also confirms this  
728 conclusion.

729 In 2012, the energy development plan for the 12<sup>th</sup> period of the five-year plan was  
730 finally proposed. During this period (2011-2015), the government gradually established  
731 an effective and reasonable mechanism to control the total amount of energy used. It  
732 was planned that China's total energy consumption should stabilise at about 4.1 billion  
733 standard tons in 2015. In the future, the government would levy a tax on fossil energy  
734 consumption. The plan also set a target for each province to reduce its energy intensity,  
735 with the western regions including Ningxia, Inner Mongolia and Gansu aiming for a 15  
736 per cent reduction, and the eastern regions of Jiangsu, Zhejiang and Guangdong trying  
737 to achieve an 18 per cent reduction. These measures have significantly reduced coal

738 consumption and carbon intensity in the thermal electricity and heating sector. In  
739 addition, the average price of thermal coal at the end of 2011 had nearly tripled to in  
740 excess of 850 yuan/ton, compared with 227 yuan/ton in 2000. Soaring coal prices have  
741 caused huge losses in the downstream thermal electricity industry, and the demand for  
742 coal has also been greatly reduced. It also clearly shows that there was a significant  
743 decline in the CO<sub>2</sub> emissions per unit of electricity from 2012 to 2015.


744 On 18<sup>th</sup> June 2019, the People's Daily announced that China's energy intensity had  
745 dropped by 11.35 per cent since the implementation of the 13<sup>th</sup> five-year plan (2016-  
746 2020), and the dual control target for energy consumption and energy intensity met the  
747 scheduled requirements of the 13<sup>th</sup> five-year plan. However, the energy intensity of the  
748 thermal electricity and heating sector did not show a downward trend from 2015 to  
749 2018. Table 4 shows that, except for the eastern region, CO<sub>2</sub> emissions per unit of  
750 electricity in other regions increased, especially in the northeastern and western regions.  
751 Shanxi province in the western region experienced the largest increment, with an  
752 increase of 3.03. This may be due to the significant increase in the installed capacity of  
753 thermal power, resulting in a significant increase in fossil energy consumption. Since  
754 2016, the installed capacity of thermal power has maintained a rapid growth rate. By  
755 the end of September 2017, the installed capacity of thermal electricity in China had  
756 reached 1.08 billion kilowatts, which is close to the red line set in the Thirteenth Five-  
757 Year Plan. Table 1 shows that the energy use of raw coal in the thermal electricity and  
758 heating sector rose from 1.43 billion tons of standard coal in 2015 to 1.66 billion tons  
759 of standard coal in 2018. In November 2017, Polaris power grid reported that the supply  
760 of thermal electricity had greatly increased, and there was an obvious imbalance  
761 between supply and demand. In the future, the energy policy aims to achieve a balance  
762 between stock adjustment and incremental optimisation in the thermal electricity sector  
763 on a regional basis. Striking a balance between clean energy development and fossil  
764 energy utilisation may help to reduce energy intensity.

#### 766 *4.2.2 Analysis of the emission reduction mechanism of the energy structure effect*

767 As shown in Figure 7, the energy structure effect has continuously reduced  
768 emissions by 8.49%, 0.98% , 103.18% and 5.18%, respectively, during the four periods  
769 studied. Between 2010 and 2012, the emission reduction effect was relatively small.  
770 However, it then significantly improved during the period from 2012 to 2015. To reveal  
771 the reasons behind this phenomenon, we further analysed the energy use in the thermal  
772 power sector between 2007 and 2018 and measured the carbon emission factors after  
773 the conversion of various energies into standard coal. Based on the energy use in the  
774 thermal electricity generation and heating sector shown in Table 1, we obtained the  
775 incremental consumption of each energy combustion unit in the thermal electricity and  
776 heating sector from 2007 to 2018, which is shown in Table 5 (unit: 10,000 tons).

777

### Energy structure effect

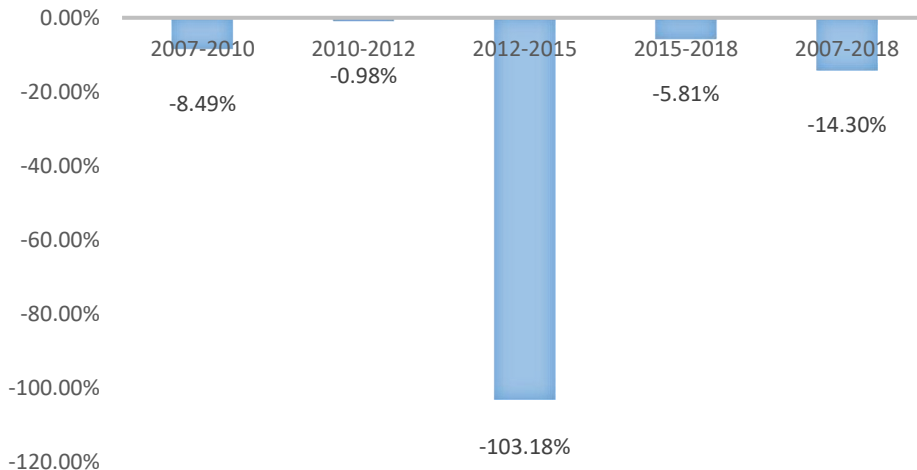

778

779

**Fig. 7.** Energy structure effect during the period 2007-2018

780

781

782

783

784

785

786

787

788

789

790

791

792

793

794

795

796

797

798

799

800

801

Table 5 shows that, compared with the period 2007-2010, there was a dramatic increase in the consumption of high-carbon energy, such as raw coal, between 2010 and 2012; while the consumption of low-carbon energy such as blast furnace gas markedly declined. This may explain the relatively weak reduction in the contribution of the energy structure effect. During the period from 2012 to 2015, the consumption of raw coal dramatically declined, while the consumption of blast furnace gas and natural gas grew markedly, which could help to explain the significant reduction in emissions caused by the energy structure effect. From 2015 to 2018, the increase in the consumption of raw coal slowed down, while increments in the consumption of blast furnace gas and natural gas remained low. During the period from 2015- 2018, the consumption of raw coal was relatively higher than the period from 2007-2010 and the consumption of low-carbon energy is smaller. Therefore, the effect of the energy structure on reducing emissions during the period 2015 to 2018 was weaker than for the period from 2007 to 2010. The results shown in Table 5 also imply that the consumption of raw coal has a big impact on carbon emissions. The large swings in raw coal consumption between 2007 and 2015 may be due to the fact that the construction of coal bases in the western provinces accelerated during the period from 2010 to 2012, thereby greatly increasing the supply of coal. In 2012, the 12<sup>th</sup> period's five-year energy development plan imposed mandatory controls on coal consumption. At the same time, coal prices rose, and low-carbon energy was increasingly used to replace raw coal. These developments led to a significant reduction in the energy structure effect between

802 2012 and 2015. In addition, the consumption of high-carbon energy such as washed  
803 coal, diesel oil, and fuel oil, declined relatively slowly; while the consumption of low-  
804 carbon energy such as blast furnace gas grew steadily, which also helps to explain the  
805 effect of changes in the energy structure. It can therefore be concluded that the energy  
806 structure effect has succeeded in reducing the emissions generated by China's thermal  
807 electricity and heating sector, perhaps due to the continual optimisation of the energy  
808 consumption structure.

809

810 **Table 5**

811 Increments in energy consumption (unit: 10<sup>4</sup> tce ) from 2007 to 2018.

Categories of energy	Adjusted CO <sub>2</sub> emission factors (t CO <sub>2</sub> /t tce)	Adjusted			
		2007-2010	2010-2012	2012-2015	2015-2018
Raw Coal	3.37	16872.88	21039.71	3347.37	23093.35
Cleaned Coal	2.87	-26.78	77.25	-11.88	-79.07
Other WashedCoal	2.29	93.08	-197.84	-14.81	688.77
Coke	1.36	0.00	0.00	273.89	0.00
Coke Oven Gas	3.13	5096.84	1640.83	1452.85	-253.23
Blast Furnace Gas	0.13	14818.96	3650.05	8356.69	-29.06
Converter Gas	1.06	1793.37	1600.66	237.52	10304.33
Other Gas	0.59	-11661.00	0.00	228.39	3662.86
Crude Oil	0.20	-13.60	7.47	9.90	-142.14
Gasoline	2.51	-0.06	-0.01	0.24	0.00
Kerosene	2.15	0.00	0.00	0.00	-5.50
Diesel Oil	2.05	-165.75	-116.06	-13.74	-0.25
Fuel Oil	2.10	-531.21	-135.43	-48.26	0.00
LPG	2.17	-7.29	-1.39	5.49	4.31
Refinery Gas	2.27	136.00	-67.55	-38.77	-174.26
Other Petroleum Products	1.85	-88.84	-122.60	21.04	1.27
Natural Gas	1.69	1088.61	583.04	1412.27	76.92
LNG	2.55	310.09	19.59	-25.76	-28.96

812

813

814 Next, we further analysed the impacts of the changes in energy structure on CO<sub>2</sub>

815 reduction between 2007 and 2018 and disclosed the contribution of each energy source  
 816 to carbon reduction. On the basis of the SDA decomposition, we continued to  
 817 decompose the contribution of each energy source to reducing carbon emissions. The  
 818 emissions reduction for each type of energy is shown in Table 6 (unit: 10,000 tons).

819 **Table 6**

820 Emissions reduction for each type of energy (unit: 10<sup>4</sup> t) from 2007 to 2018.

Categories of energy	2007-2010	2010-2012	2012-2015	2015-2018	2007-2018
Raw Coal	-20739.51	-3256.77	-31186.26	-20358.96	-87841.19
Cleaned Coal	-113.01	238.36	-65.40	-303.07	-231.12
Other Washed Coal	-1020.48	-2361.13	-630.04	2323.54	-2907.74
Coke	0.00	0.00	860.07	0.00	0.00
Coke Oven Gas	5372.58	-450.20	611.70	-926.23	58.60
Blast Furnace Gas	8213.76	506.70	3985.14	-3931.67	4343.37
Converter Gas	7519.44	5386.38	-225.40	2736.61	19698.05
Other Gas	-5989.46	0.00	101.43	12427.92	29273.82
Crude Oil	-33.57	10.10	15.83	-79.94	-8829.70
Gasoline	-0.14	-0.06	0.34	0.00	0.00
Kerosene	0.00	0.00	0.00	-19.82	-38.77
Diesel Oil	-415.75	-257.71	-33.62	-0.46	-0.35
Fuel Oil	-1447.52	-430.19	-154.72	0.00	0.00
LPG	-8.70	-1.59	5.45	-7.16	-976.22
Refinery Gas	80.20	-145.63	-72.01	-448.32	-3264.51
Other Petroleum Products	-302.28	-322.84	41.53	0.13	-8.79
Natural Gas	1278.88	245.23	1943.67	19.73	-120.37
LNG	376.85	-46.66	-69.20	-83.77	-879.37
Total reduction effect	-7228.72	-886.01	-24871.51	-6731.17	-45176.8

821

822 Table 6 clearly shows that different energy sources had differing impacts on  
 823 reducing emissions from China's electricity and heating industries between 2007 and  
 824 2018. Changes in energy structure, involving a reduction in the use of raw coal, cleaned  
 825 coal, other washed coal, crude oil, kerosene, diesel oil, LPG, refinery gas and other  
 826 petroleum products, natural gas and LNG had significant effects on emissions reduction  
 827 in China's thermal electricity and heating sector during this period. Between 2007 and  
 828 2010, increments in the use of coke oven gas, blast furnace gas, converter gas, refinery  
 829 gas, natural gas and LNG increased CO<sub>2</sub> emissions. From 2010 to 2012, the increase in  
 830 cleaned coal, blast furnace gas, converter gas, crude oil, and natural gas had a positive  
 831 effect on CO<sub>2</sub> emissions. From 2012 to 2015, the increases in coke, coke oven gas, blast  
 832 furnace gas, other gas, crude oil, LPG, other petroleum products and natural gas had

833 the effect of raising CO<sub>2</sub> emissions. From 2015 to 2018, the increase in other washed  
 834 coal, converter gas, other gas, other petroleum products and natural gas caused a  
 835 corresponding increase in CO<sub>2</sub> emissions. These results further confirm that increasing  
 836 the consumption of low-carbon energy, such as blast furnace gas and converter gas, and  
 837 cutting down the use of raw coal, contributes to emissions reduction.

838 The following conclusions can be drawn. First, from 2012 to 2015, energy  
 839 structure optimisation had the most significant effects on reducing emissions, while the  
 840 period from 2007 to 2010 and the period from 2015 to 2018 saw a smaller reduction.  
 841 Changes in the energy structure during the period from 2010 to 2012 had the least effect  
 842 on reducing emissions. Second, increasing the consumption share of low-carbon energy  
 843 is conducive to reducing emissions. In addition to reducing raw coal, cleaned coal, other  
 844 washed coal, crude oil and refinery gas, decreasing the proportion of high-carbon  
 845 energy sources, such as diesel oil, kerosene and other petroleum products, had limited  
 846 effects on emissions reduction. Therefore, the reduction in emissions from China's  
 847 thermal electricity and heating sector as a result of adjusting the energy structure was  
 848 mainly caused by the increased share of low-carbon energy, while the emissions  
 849 reduction effect was relatively small in the case of high-carbon energy, such as diesel  
 850 oil, kerosene and other petroleum products.

851 This study then further explored how the energy structure in China's thermal  
 852 electricity and heating sector could be optimised. Based on Sun and Huang's (2021)  
 853 study, the SBM-DEA model that treats CO<sub>2</sub> as an unexpected output was introduced to  
 854 estimate the slack variables for the 30 provinces from 2007 to 2018. Studying the slack  
 855 variables is helpful in terms of discovering the causes of energy efficiency loss and can  
 856 thus provide a scientific reference for adjusting the energy structure. Table 7 presents  
 857 the results of the energy efficiency and the slack variables in relation to China's thermal  
 858 electricity and heating sector from 2007 to 2018. The average energy efficiency values  
 859 for all 30 provinces in each period are all less than 1, which means the energy structure  
 860 needs to be further optimised.

861

862 **Table 7**

863 Energy efficiency and slack variables from 2007 to 2018.

Year	Score	Slack variables (unit: 10 <sup>4</sup> tec)				
		Total Coal	Petroleum Products	Gas	Coal gas	CO <sub>2</sub> (10 <sup>4</sup> tons)
2007	0.924	-23.98	-4.30	-1.00	-86.93	-119.69
2010	0.921	-16.19	-6.75	-4.87	-121.25	-116.03
2012	0.955	-22.36	-5.71	-2.85	-37.58	-133.44
2015	0.947	-31.78	-3.90	-1.81	-67.17	-140.18
2018	0.933	-19.74	-3.88	-2.63	-102.83	-312.79

864 Note: The 20 energy sources are divided into four major categories and converted into standard coal.

865

866 In 2007, the total coal, petroleum products, gas and coal gas had a redundancy of  
 867 239,776 tec, 42,977 tec, 10,035 tec and 869,267 tec, respectively. Meanwhile, CO<sub>2</sub>  
 868 emissions had a redundancy of 0.12 million tons. To achieve the energy efficiency target


869 for 2010, the thermal electricity and heating sector needed to reduce its consumption of  
870 total coal, petroleum products, gas and coal gas by 161,875 tec, 67,507 tec, 48,719 tec  
871 and 1,212,539 tec, respectively. In the same year, CO<sub>2</sub> emissions had a redundancy of  
872 0.116 million tons. In 2012, the consumption of total coal, petroleum products, gas and  
873 coal gas had a redundancy of 2,336,063 tec, 57,081 tec, 28,504 tec and 375,772 tec,  
874 respectively. CO<sub>2</sub> emissions can be reduced by 0.133 million tons when the energy  
875 efficiency reaches the optimal value. For 2015, the total coal, petroleum products, gas  
876 and coal gas had a redundancy of 239,776 tec, 42,977 tec, 10,035 tec and 869,267 tec,  
877 respectively, while CO<sub>2</sub> emissions had a redundancy of 0.12 million tons. Similarly, the  
878 input redundancy values of various energy sources and the CO<sub>2</sub> emissions reduction in  
879 2015 and 2018 can be obtained from the data shown in Table 7. In summary, the value  
880 of energy efficiency was at its highest in 2012, out of all the five periods, and the energy  
881 efficiency value is consistent with the effect of the energy structure on emissions  
882 reduction to a certain extent from 2007 to 2018. In addition, the redundancy values of  
883 coal-related products were relatively large in each of the periods studied, which implies  
884 that the input of coal-related products should be reduced.

#### 885 *4.2.3 Analysis of the contribution of the input-output structure effect*

886 The input-output structure effect was derived by changing the Leontief inverse.  
887 The elements of the Leontief inverse indicate the impact of a unit change in the  
888 exogenous final demand on the output of the industry. In addition, each element in the  
889 Leontief inverse reflects the direct and indirect effects arising from the interdependence  
890 of sectors or industries in the production of goods and services to meet the final demand.  
891 The traditional view usually treats the Leontief inverse matrix as the final form of the  
892 direct consumption coefficient matrix in order to capture the linkages between sectors  
893 or industries and measure technological progress and changes in production structure.  
894 For policy and planning purposes, Stone and Brown (1962) suggest that the direct  
895 consumption coefficient can be further decomposed using the RAS method into the  
896 substitution effect and fabrication effect to reflect the change in the production  
897 substitution rate and the technical level, respectively. Dietzenbacher and Los (1998)  
898 combined the RAS method and the SDA model to decompose the direct consumption  
899 coefficient matrix and calculated the production substitution rate and technical level in  
900 specific units. To improve the efficiency and scope of the RAS method, Tho (1998)  
901 directly applied the RAS procedure to the Leontief inverse and decomposed the  
902 substitution and fabrication factors.

903 The Leontief inverse is a powerful tool in I-O analysis. It plays an important role  
904 in economic impact studies, structural change analysis and the identification of key  
905 sectors for development planning. In our study, the input-output structure effect  
906 comprehensively reflects the efficiency of the production technology and production  
907 structure used in thermal electricity production. Fig. 8 shows that, in the first two  
908 periods and the fourth period, the input-output structure had the effect of reducing  
909 emissions. This indicates that the country's determination to push forward the upgrading  
910 of thermal electricity generation technology has made substantial progress. However,  
911 during the period from 2012 to 2015, the input-output structure effect became a driver  
912 for increasing carbon emissions.



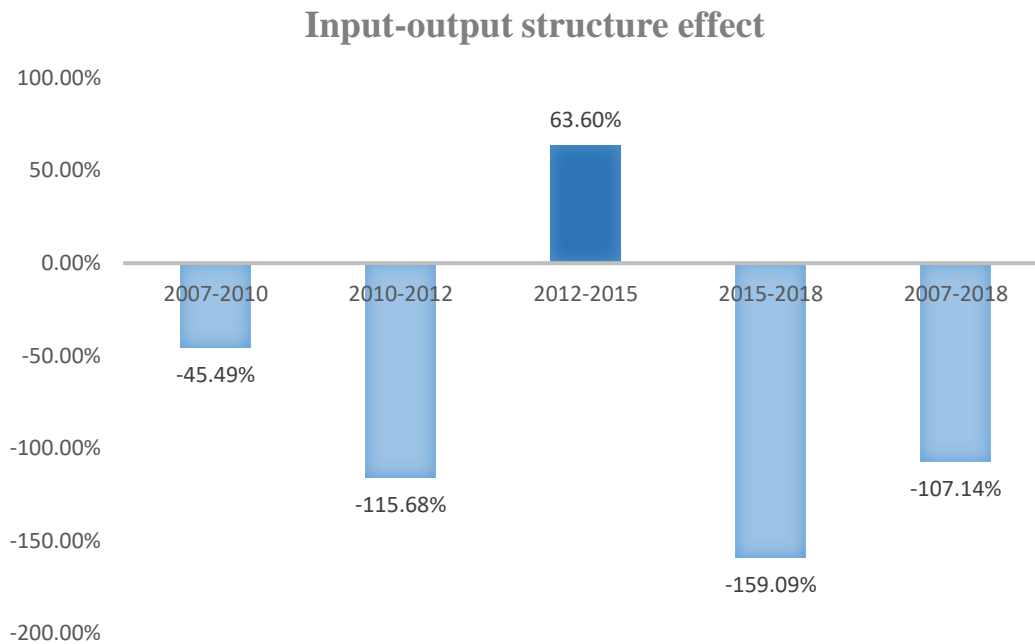

914

915

**Fig. 8.** Input-output structure effect during the period 2007-2018

916

917

918

919

920

921

922

923

924

925

926

927

928

929

930

931

932

933

934

935

Due to the lag in the market reform of the industrial development mechanism and the rise in coal prices, electricity generation enterprises have suffered continuous losses since 2011. Electricity generation companies are not optimistic about the prospect of being able to make a profit from thermal electricity and there have been no significant breakthroughs in the reform of the national electricity system. Therefore, thermal electricity enterprises started to significantly reduce both investment and electricity generation, leading to a reduction in the utilisation rate of thermal electricity equipment and a significant weakening of the effect of technological upgrading and the scale effect. According to data released by the China electricity council, in the first quarter of 2012, the country produced an additional 6.49 million kilowatts of thermal electricity, which is 3.52 million kilowatts less than in the preceding year. In 2014, investment in thermal electricity was significantly lower than that of wind-powered electricity and hydroelectricity. Furthermore, given the slow growth rate of the national installation capacity in 2015 and the decline in the growth rate of electricity consumption under the “New Normal”<sup>2</sup>, the utilisation hours of equipment for the industry as a whole did not improve significantly until 2015. The Malmquist total factor production index for the adjacent base period shown in Table 8 indicates that the productivity of the thermal electricity sector decreased during the period 2012-2015, which proves that the effect of upgrading technology in the thermal electricity sector was not very effective.

<sup>2</sup> ‘New Normal’ refers to a sustainable medium to high growth stage. The economic growth rate in 2015 was relatively low, and it suppressed the demand and consumption.

936

937 **Table 8**

938 Malmquist total factor production index for adjacent base period.

Time span	Malmquist total factor production index	Technical efficiency change	Technological change
2007-2010	1.1551	1.0387	1.1039
2010-2012	1.0564	1.0854	0.9661
2012-2015	0.9998	1.0081	0.9997
2015-2018	1.1630	1.0075	1.1579


939 Note: A Malmquist index greater than 1 indicates an increase in productivity, while an index less than 1 indicates a decrease in  
940 productivity.

941

942 *4.2.4 Analysis of the contribution of the final demand effect*

943 Figure 9 shows that the final demand effect is one of the main driving forces behind  
944 the increase in CO<sub>2</sub> emissions in China's thermal electricity and heating sector, and that  
945 it continues to increase.

946

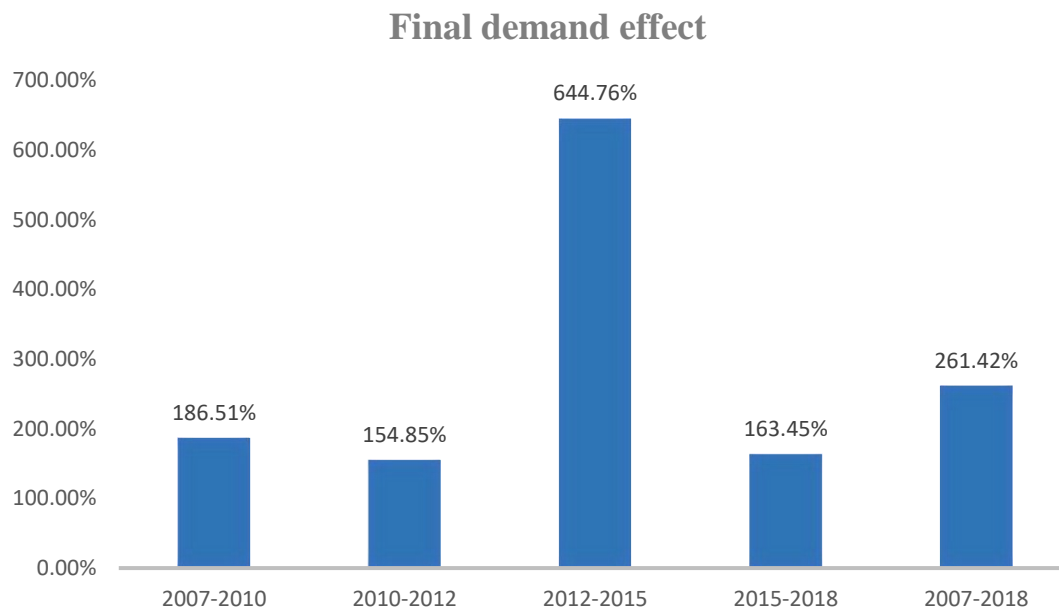

947

948 **Fig. 9.** Final demand structure effect between 2007 and 2018

949

950 Next, the study specifically analysed the contribution of the scale change in each  
951 industry to the growth in carbon emissions generated by the thermal electricity and  
952 heating sector from 2007 to 2018. The impacts of changes in the scale of various  
953 industries on CO<sub>2</sub> emissions in China from 2007 to 2018 are shown in Table 5 (unit:  
954 10,000 tons) and Figure 6.

955

956 **Table 9**

957 Impact of changes in final demand of various industries on carbon emissions.

<b>Sector</b>	<b>2007-2010</b>	<b>2010-2012</b>	<b>2012-2015</b>	<b>2015-2018</b>	<b>2007-2018</b>
Service sector	38120.12	28569.87	41800.38	42750.01	181793.88
Heavy industry	62106.87	22890.26	30260.16	9139.25	115215.89
Light industry	17666.58	11259.78	17489.58	1273.01	46383.23
Construction industry	51032.65	34320.07	89889.03	48256.74	234792.06
Chemical industry	664.97	5494.67	1213.90	4075.51	11898.61
Agriculture	-78.53	4971.74	-1490.38	2955.11	6499.13
Transportation industry	-2782.98	7023.59	-978.22	7850.94	12905.97
Fossil energy sector	-7622.42	-2068.26	9919.88	-8417.06	-8532.81
Electricity sector	-353.21	27939.34	-32684.84	81628.54	82567.38
Total	158754.05	140401.05	155419.49	189512.04	683523.33

958

959 Table 9 and Figure 9 show the impact of changes in China's industrial demand on  
960 the growth of CO<sub>2</sub> emissions from 2007 to 2018. It can be seen that the scale of  
961 industrial expansion within the service sector played a dominant role in promoting the  
962 growth of CO<sub>2</sub> emissions in the thermal electric and heating sector during the period  
963 from 2007 to 2018. Regarding the final demand effect, the fossil energy, transport,  
964 agriculture and electricity sectors all experienced a reduction in emissions between  
965 2007 and 2010. During the periods 2010-2012 and 2015-2018, fossil energy continued  
966 to play a role in reducing CO<sub>2</sub> emissions, but the other sectors all contributed to an  
967 increase in CO<sub>2</sub> emissions. From 2012 to 2015, the growth of demand in the service  
968 industry, the construction industry, heavy industry and light industry played a major  
969 part in the increase in CO<sub>2</sub> emissions, while the transport industry, agriculture and the  
970 electric power industry contributed to a reduction in emissions. In terms of the industrial  
971 structure, within the secondary industries sector, heavy industry and the construction  
972 industry were the major contributors to CO<sub>2</sub> emissions from the thermal electricity and  
973 heating sector. However, the contribution of the service industry and agriculture were  
974 relatively low. If expansion continues on the same scale, the effect of the primary and  
975 tertiary industries (agriculture and services) on increasing CO<sub>2</sub> emissions from electric  
976 heating energy will be less than that of the secondary industries (manufacturing).  
977 Although the increase in the scale of industrial expansion will lead to an increase in  
978 carbon emissions from the electricity and heating sector, increasing the ratio of the  
979 primary and tertiary industrial structures is conducive to slowing down the growth rate  
980 of carbon emissions from electricity and heating energy.

981

982 **5. Discussion and policy implications**

983 With the continuous growth of China's economy, thermal electricity and heating

984 supply have become one of the most important material foundations of economic  
985 development. At the same time, the carbon emissions produced by electricity generation  
986 not only have adverse effects on the environment, but also restrict the development of  
987 China's economy. In 2015, the electricity industry in China released 48.6 percent of the  
988 country's CO<sub>2</sub>, of which coal-fired CO<sub>2</sub> emissions accounted for the largest share.  
989 During the 11<sup>th</sup> and 12<sup>th</sup> periods of the five-year plans, China pursued carbon emission  
990 reduction policies aimed at the thermal electricity and heating sector, such as  
991 accelerating the upgrading of technology, reducing energy consumption and optimising  
992 the energy structure in the thermal and heating sector. Some scholars such as Paul (2016)  
993 and Wang (2019) have also focused on thermal electricity and applied the  
994 decomposition method to investigating the drivers behind the rise in CO<sub>2</sub> emissions  
995 during the period 2002-2012 using aggregated five-yearly data, in an attempt to provide  
996 guidance for energy policy. They maintained that the increase in CO<sub>2</sub> emissions from  
997 electricity generation during the period 2002-2012 was mainly driven by changes in  
998 electricity demand.

999 However, in the decomposition process, they only specified the total effect of  
1000 energy structure optimisation and final demand, and ignored the specific amount of  
1001 reduction in carbon emissions produced by each energy source and each industrial  
1002 sector. Moreover, data that is based on a five-year cycle tends to obscure the mechanism  
1003 behind energy policy, and thus may produce misleading results. With the launch of  
1004 subsequent economic stimulus policies, China's energy demand underwent a rapid  
1005 increase from 2007 to 2018. In order to trade off between economic development and  
1006 reducing carbon emissions, and to formulate appropriate future energy policies, it is  
1007 crucial to investigate the contribution made by each of the industrial sectors to CO<sub>2</sub>  
1008 emissions, and assess whether the energy policy is having the desired effect. Based on  
1009 our aggregated data decomposition for the three-yearly data, we argue that the  
1010 formulation of energy policies should take into consideration the contextual factors  
1011 affecting each province and adapt measures to local conditions. The purpose of our  
1012 research is to provide policy guidance for formulating a more effective energy policy  
1013 that is better suited to the reality of the situation.

1014 From 2007 to 2018, CO<sub>2</sub> emissions from the thermal electricity and heating sector  
1015 initially rose and then fell and then increased again, reaching a local peak in 2012. In  
1016 general terms, the study shows that the energy structure effect, and the input-output  
1017 structure effect are the main factors which account for the overall reduction in CO<sub>2</sub>  
1018 emissions between 2007 and 2018. In particular, advances in electricity generation  
1019 technology have played a prominent role in reducing CO<sub>2</sub> emissions. The demand effect  
1020 caused by the expansion in the scale of the economy was the main factor driving the  
1021 increase in CO<sub>2</sub> emissions from 2007 to 2018. The energy intensity effect had a weak  
1022 effect on increasing CO<sub>2</sub> emissions from 2007 to 2018.

1023 In addition, we also found that the ongoing upgrading of technology used in  
1024 thermal power generation has not played a very important role in reducing emissions.  
1025 In other words, in order to be effective, the technology upgrading effect needs to be  
1026 accompanied by the market reform of thermal power prices. For example, between 2007  
1027 and 2015, the input-output structure effect had the largest impact on emissions reduction

1028 in the thermal electricity and heating sector. This shows that China's long-term policy  
1029 of encouraging technological innovation in electricity production has had significant  
1030 positive effects. The implementation of new technologies not only reduces energy  
1031 consumption, but also curbs the rise in carbon emissions. Moreover, technological  
1032 innovation affects the input-output structure of each sector of the national economy.  
1033 Changes in the input-output structure will reduce the input of products that generate  
1034 high carbon emissions, thus helping to achieve the goal of reducing carbon emissions.  
1035 However, the effect of technology on emissions transformed from a positive to a  
1036 negative one during the period between 2012 and 2015. The explanation for this lies in  
1037 the fact that the market reform of thermal power prices lags behind that of coal prices,  
1038 resulting in a conflict between the marketised coal system and the nationally planned  
1039 electricity system, which has worsened in recent years. With the rise in coal prices,  
1040 thermal electricity enterprises suffered serious losses, which led to a substantial  
1041 reduction in investment and electricity generation. This in turn resulted in a significant  
1042 reduction in the utilisation rate of thermal electricity equipment and a significant  
1043 reduction in the scale effect and the effect of technological upgrading. This finding  
1044 indicates that policymakers should accelerate the market-oriented reform of electricity  
1045 prices, otherwise efforts to vigorously promote the upgrading of technology may be  
1046 counterproductive. In addition, technological innovation requires substantial and  
1047 sustained capital investment. The government could provide this through tax collection  
1048 to reduce the research and development (R&D) costs of enterprises and stimulate  
1049 further R&D.

1050 Under China's strict energy intensity reduction target policy, the energy intensity  
1051 rebounded significantly in 2012. Although the energy intensity effect was the second  
1052 most important factor accounting for emissions reduction during the period from 2007  
1053 to 2015, it nonetheless became a driver of emissions growth between 2010 and 2012.  
1054 In addition, according to the overall decomposition results for the period from 2007 to  
1055 2018, energy intensity had a weak effect on increasing CO<sub>2</sub> emissions. During the 11<sup>th</sup>  
1056 period of the five-year plan (2006-2010), the Chinese government set a mandatory  
1057 target of reducing energy intensity by 20%. During the 12<sup>th</sup> period of the five-year plan  
1058 (2011-2015), the government set targets for individual provinces to reduce their energy  
1059 intensity. However, a breakdown of the results shows that energy intensity increased  
1060 significantly between 2010 and 2012, becoming the main driver of carbon emissions.  
1061 This is probably due to the large coal reserves and backward economy in the western  
1062 region of China, and the fact that GDP growth in the northwestern provinces became  
1063 increasingly dependent on the development of coal-related industries. In the face of  
1064 surging coal consumption and industrial electricity consumption, these western  
1065 provinces have been unable to resist the temptation of rising demand and have greatly  
1066 increased their mining activity. This implies that the government should focus on  
1067 accelerating energy substitution and the upgrading of technology in the western region;  
1068 however, in fact this could have a negative impact if the policy objectives are  
1069 inconsistent with the reality of the situation. During the 13<sup>th</sup> period of the five-year plan  
1070 (2016-2020), the increase in energy intensity may have been due to the significant  
1071 increase in the installed capacity of thermal power, resulting in a significant increase in

1072 fossil energy consumption. To resolve this problem, the energy policy aims to achieve  
1073 a balance between stock adjustment and incremental optimisation in the thermal  
1074 electricity sector on a regional basis, which may prove to be more effective.

1075 The energy structure effect in the thermal electricity and heating sector produced  
1076 a sustained reduction in emissions; however, the reduction effect was relatively small.  
1077 This confirms that the energy consumption structure in the electricity sector has been  
1078 continually optimised, which is due to the strong support for the development of clean  
1079 energy provided by the Chinese government. From the numerical value of the energy  
1080 consumption structure effect, it can be seen that the utilisation ratio of clean energy in  
1081 China is not very high, and its contribution to reducing carbon emissions remains small.  
1082 In the future, the Chinese government should continue to support and encourage  
1083 enterprises to use clean energy, for example by offering subsidies or tax reductions.

1084 The final demand effect was the main driving force behind CO<sub>2</sub> emissions from  
1085 the thermal electricity and heating sector during the period from 2007 to 2018. The  
1086 decomposition of the final demand effect suggests that, among secondary industries,  
1087 the construction industry was the main contributor. Overall, the amount of electricity  
1088 and heating energy used in the secondary industries was generally higher than that in  
1089 the primary and tertiary industries. It is vital to maintain a balance between CO<sub>2</sub>  
1090 emissions and economic development in these sectors. Reducing the demand for  
1091 electricity and heating energy from the secondary industries is conducive to  
1092 decelerating the growth in carbon emissions from electric and heating energy sources,  
1093 which is also in line with China's industrial restructuring policy. In order to adjust the  
1094 economic structure and growth pattern, it appears that a circular, energy-saving  
1095 economy may be the way forward. By adapting the industrial structure and, as far as  
1096 possible, achieving low carbonisation of the final product, the energy demand structure  
1097 and energy efficiency can be improved.

1098 In terms of practical implications, first, efforts to develop energy restructuring and  
1099 clean energy substitution have become particularly important in order to reduce carbon  
1100 emissions in various countries such as China and EU member countries. Due to the  
1101 idiosyncracies of the existing electricity supply structure and layout in China's  
1102 electricity sector, measuring the impact of energy structure adjustment is of particular  
1103 significance for formulating energy policy. Second, this paper investigated the impact  
1104 of the energy intensity effect on CO<sub>2</sub> emissions reduction in the thermal electricity and  
1105 heating sector. In addition, we also identified the causes of the contradiction between  
1106 the energy intensity policy and the reality of the situation. Reducing energy intensity  
1107 within the production process has become the core goal of environmental policy. As  
1108 China was the largest consumer of fossil fuels in the world in 2011 (BP, 2012), studying  
1109 the changes in energy intensity in the thermal electricity and heating sector can provide  
1110 guidance for a carbon emissions reduction policy that is able to cope with the  
1111 increasingly stringent energy constraints on economic development as well as the  
1112 increasingly serious environmental problems. Third, the input-output structure reflects  
1113 the production technology used. Thus, investigating the input-output structure effect in  
1114 the thermal electricity and heating sector is conducive to measuring the contribution of  
1115 the technological mitigation effect, as well as its evolutionary trend, and providing

1116 guidance for the government to tailor its energy policy accordingly. In addition, China's  
1117 demand for electricity has continually increased, and the country is now facing huge  
1118 fluctuations in electricity demand and a system with insufficient peak regulation  
1119 capacity to cope with these. Investigating the demand structure and its impact on CO<sub>2</sub>  
1120 emissions reduction can help to predict demand for thermal electricity and heating.  
1121 Doing so can inform policies designed to optimise the demand structure, improve the  
1122 efficiency of electricity utilisation, and formulate electricity development plans to  
1123 ensure stable electricity generation and a stable supply.

1124

## 1125 **6. Conclusions**

1126 In this study, we determined the key drivers of CO<sub>2</sub> emissions China's thermal  
1127 electricity and heating sector by applying the IO-SDA method from 2007 to 2018. We  
1128 also studied the evolutionary trends of these drivers, analysed the internal causes of the  
1129 changes in each driver and assessed the impacts of the country's energy policy on the  
1130 drivers of CO<sub>2</sub> emissions in the thermal electricity and heating sector. This produced  
1131 four main findings:

1132 First, the growth in final demand was the main driving force behind the rise in CO<sub>2</sub>  
1133 emissions, which indicates that the swift expansion in the scale of the economy is  
1134 largely responsible for increasing CO<sub>2</sub> emissions. Increased demand for electricity and  
1135 heating in the service, and construction industries, and in heavy industries, was the main  
1136 factor that explains the sharp increase in CO<sub>2</sub> emissions from the thermal electricity and  
1137 heating sector. Moreover, the contribution of the construction industry to the final  
1138 demand effect increased to a greater extent than that of heavy industry, because the  
1139 country has stepped up its efforts to phase out energy-intensive, heavily polluting  
1140 industries, such as steelmaking, so the demand for electricity from heavy industry has  
1141 fallen. The construction industry is closely related to economic development, and  
1142 infrastructure investment is also a key measure through which China is attempting to  
1143 stabilise economic growth. Therefore, further reductions in energy-intensive heavy  
1144 industry and increased optimisation of energy demand and electricity utilisation in the  
1145 construction industry can effectively reduce carbon emissions from thermal electricity  
1146 generation.

1147 Second, the emissions reduction seen in the thermal electricity and heating sector  
1148 can mainly be attributed to improvements in the input-output structure. However,  
1149 ongoing technological upgrading in the thermal power sector has not resulted in the  
1150 desired reduction in emissions. This is because the market reform of the industrial  
1151 development mechanism lags far behind the pace of technological development, and  
1152 the conflict between the use of coal and the use of electricity has worsened. With the  
1153 rise in coal prices, thermal electricity enterprises suffered serious losses, which led to a  
1154 substantial reduction in investment and electricity generation. This led to a significant  
1155 reduction in the utilisation rate of thermal electricity equipment as well as in the scale  
1156 effect and the effect of technological upgrading. This implies that China needs to speed  
1157 up its reform of electricity price marketisation.

1158 Third, the decrease in energy intensity was the second driving force behind the

1159 reduction in emissions during the period from 2007 to 2015. However, the overall  
1160 decomposition results from 2007 to 2018 indicate that the change in energy intensity  
1161 had a weak effect on increasing CO<sub>2</sub> emissions. In addition, we also found that the  
1162 mandatory reduction in energy intensity proposed in the 11<sup>th</sup> period of the five-year plan  
1163 actually had the opposite effect between 2010 and 2012. This can be largely attributed  
1164 to the long-term dependence of the western region's economy on coal-based resources.  
1165 The increased demand for electricity, brought about by economic growth, prompted the  
1166 western region to expand its coal production and form a nascent energy base. This  
1167 finding suggests that the government should have given priority to accelerating energy  
1168 substitution and upgrading technology in the western region, because focusing only on  
1169 reducing energy intensity could backfire. The eastern region could focus on enhancing  
1170 the technological advantages and improving the technological efficiency of thermal  
1171 power generation. With regard to the central region, efforts should be directed at  
1172 improving thermal power generation technology, gradually phasing out small coal  
1173 power enterprises, making full use of its resource advantages and improving the  
1174 efficiency of its energy utilisation. Finally, the northeastern region of the country should  
1175 continue to close down and/or improve small thermal power plants that are associated  
1176 with high energy consumption and heavy pollution. The increment in energy intensity  
1177 in 2018 implies that, during the 13<sup>th</sup> period of the five-year plan (2016-2020), it may be  
1178 prove more effective to try to achieve a balance between stock adjustment and  
1179 incremental optimisation in the thermal electricity sector on a regional basis.

1180 Finally, but importantly, optimising the energy structure to replace high carbon  
1181 fossil energy with low carbon energy, such as blast furnace gas and converter gas in the  
1182 thermal electricity and heating sector has had a sustained reduction effect, which is  
1183 consistent with the policy objectives and the mainstream literature. However, the effect  
1184 on reducing carbon emissions remains small, and progress still needs to be made in  
1185 terms of low carbon energy and clean energy alternatives. Overall, in the process of  
1186 implementing emissions reduction measures at the production end of the electricity and  
1187 heating sector, it is important to strike a balance between economic development and  
1188 energy consumption. In addition, when formulating energy policies, policymakers need  
1189 to take full account of the reality of the situation in each province and adapt measures  
1190 to local conditions.

1191 In terms of policy implications, we suggest that energy policies should be more  
1192 flexible and adaptive to the varying socio-economic conditions in different cities and  
1193 provinces in China. The eastern region could focus on enhancing the technological  
1194 advantages and improving the technological efficiency of thermal power generation.  
1195 More specifically, Tianjin, Hebei and Fujian should proactively adjust their energy  
1196 consumption structure in order to reduce energy consumption and increase the  
1197 proportion of new energy development and utilisation. The central region should focus  
1198 more on improving thermal power generation technology, gradually phasing out small  
1199 coal power enterprises, making full use of resource advantages and improving the  
1200 efficiency of its energy utilisation. In addition, energy policies should guide the  
1201 technological transformation and upgrade the manufacturing industry in the central  
1202 region, and encourage a shift from more traditional industries to greener development.



1203 With regard to the agriculture-oriented areas in central China, the government should  
1204 encourage the development of more modern forms of agriculture geared towards  
1205 producing scarce, higher value products, which can then be sold for higher prices. The  
1206 western region contains large provinces such as Guizhou, Shaanxi and Inner Mongolia,  
1207 whose industries are largely based on coal production and fossil energy consumption,  
1208 which means that it will take a longer for energy saving measures to make progress.  
1209 These regions need to achieve low-carbon development through internal integration and  
1210 the optimisation of coal-power-related industries. Therefore, it is necessary to  
1211 concentrate equally on structural adjustment and technological progress, and in  
1212 particular to improve the technological capabilities of the coal and coal-chemical  
1213 industries that are associated with high energy consumption. At the same time, the  
1214 promotion of energy saving technology and 'clean coal' technology in these areas is  
1215 also essential. In the case of provinces with abundant wind and solar energy resources,  
1216 such as Inner Mongolia, Gansu and Xinjiang, the local governments should encourage  
1217 the proactive development of clean energy. Liaoning, Jilin and Heilongjiang provinces  
1218 in northeastern China should continue to close down and/or improve small thermal  
1219 power plants, particularly those associated with high energy consumption and heavy  
1220 pollution. At the same time, they should also shut down small steel and cement  
1221 enterprises. In addition, accelerating market-oriented reform in relation to electricity  
1222 pricing is also important in order to realise the benefits of technology upgrading and  
1223 innovation, because the moderate liberalisation of energy prices could relieve the cost  
1224 pressure of thermal power enterprises, resolve the contradiction between coal and  
1225 electricity to some extent, and reduce the scale effect and technology effect of thermal  
1226 power enterprises. The market-oriented reform of electricity pricing should not only  
1227 focus on the price per se, but should also be accompanied by adjustments in the  
1228 industrial structure and the adoption of a new development pattern involving different  
1229 pricing levels. For example, industries and enterprises that consume a lot of electricity  
1230 and generate a high level of emissions should be forced to reduce their energy  
1231 consumption by having to pay higher prices.

1232 This research has some limitations. Thermal electricity generation contributes to  
1233 over a third of China's energy-related CO<sub>2</sub> emissions. Therefore, it is worthwhile  
1234 evaluating the efficiency of thermal electricity generation and estimating its potential  
1235 for reducing CO<sub>2</sub> emissions. Although we attempted to assess the efficiency of the  
1236 production technology in our study, the findings remain sketchy. Therefore, future  
1237 research could focus on constructing more comprehensive indicators with which to  
1238 evaluate the efficiency of thermal electricity generation.

1239  
1240  
1241

1242 **References**

- 1243 Ang, B. W. (1999). Is the energy intensity a less useful indicator than the carbon factor in the  
1244 study of climate change?. *Energy Policy*, 27(15), 943-946.
- 1245 Ang, B. W., & Su, B. (2016). Carbon emission intensity in electricity production: A global  
1246 analysis. *Energy Policy*, 94, 56-63.
- 1247 Ang, B. W., & Tian, G. (2016). Carbon intensity of electricity in asean: Drivers, performance  
1248 and outlook. *Energy Policy*, 98, 170-179.
- 1249 Ang, B. W., Zhou, P., & Tay, L. P. (2011). Potential for reducing global carbon emissions from  
1250 electricity production- A benchmarking analysis. *Energy Policy*, 39(5), 2482-2489.
- 1251 BP (2013) Statistical Review of World Energy. (Online). Available at:  
1252 [https://www.bp.com/en/global/corporate/energy-economics/statistical-review-of-world-](https://www.bp.com/en/global/corporate/energy-economics/statistical-review-of-world-energy.html)  
1253 [energy.html](https://www.bp.com/en/global/corporate/energy-economics/statistical-review-of-world-energy.html) (accessed 10 August 2021).
- 1254 Caves, D., Christensen, L., & Diewert, W. (1982). The economic -theory of index numbers and  
1255 the measurement of input, output, and productivity. *Econometrica*, 50, 1393-1414.
- 1256 Choi, K. H., & Ang, B. W. (2012). Attribution of changes in divisia real energy intensity index  
1257 – An extension to index decomposition analysis. *Energy Economics*, 34(1), 171-176.
- 1258 Cong, D., Liang L., & Jing, S., et al. (2021). Energy supply efficiency evaluation of integrated  
1259 energy systems using novel SBM-DEA integrating Monte Carlo. *Energy*, 2021, 231,  
1260 120834.
- 1261 Cooper, W., Seiford, L., & Tone, K. (2007). *Data Envelopment Analysis: A Comprehensive*  
1262 *Text with Models, Applications, References and DEA-solver Software (2<sup>nd</sup> eds.)*. New York:  
1263 Springer Science and Business Media.
- 1264 Dietzenbacher, E., & Los, B. (1998). Structural decomposition techniques: Sense and sensitivity.  
1265 *Economic Systems Research*, 10(4), 307-324.
- 1266 Fan, Y., Liu, L. C., Wu, G., Tsai H. T., & Wei, Y. M.. (2007). Changes in car bon intensity in  
1267 China: Empirical findings from 1980–2003. *Ecological Economics*, 62(3), 683-691.
- 1268 Fare, R., Grosskopf, S., Lindgren, B., & Roos, P. (1992). Productivity changes in Swedish  
1269 pharamacies 1980-1989: A non-parametric Malmquist approach. *Journal of Productivity*  
1270 *Analysis*, 3, 85-101.
- 1271 Fu B., Wu M., Che Y., Wang, M., Huang, Y. and Bai, Y. (2015). The strategy of a low-carbon  
1272 economy based on the STIRPAT and SD models. *Acta Ecologica Sinica*, 35 (4), 76-82.
- 1273 Graus, W., & Worrell, E. (2009). Trend in efficiency and capacity of fossil electricity generation  
1274 in the EU. *Energy Policy*, 37(6), 2147-2160.
- 1275 Hoekstra, R., & Van den Bergh, J.C. (2002). Structural decomposition analysis of physical  
1276 flows in the economy. *Environmental and Resource Economics*, 23(3), 357-378.
- 1277 Han, Y., Zhou, R., & Geng, Z., et al. (2020). A novel data envelopment analysis cross-model  
1278 integrating interpretative structural model and analytic hierarchy process for energy  
1279 efficiency evaluation and optimization modeling: Application to ethylene industries.  
1280 *Journal of Cleaner Production*, 245, 118965.
- 1281 IEA (2016) World Energy Outlook. (Online). Available at: [https://www.iea.org/reports/world-](https://www.iea.org/reports/world-energy-outlook-2016)  
1282 [energy-outlook-2016](https://www.iea.org/reports/world-energy-outlook-2016) (accessed 15 August 2021).
- 1283 IPCC (2006) IPCC Guidelines for National Greenhouse Gas Inventories. (Online). Available at:  
1284 [https://www.ipcc.ch/report/2006-ipcc-guidelines-for-national-greenhouse-gas-](https://www.ipcc.ch/report/2006-ipcc-guidelines-for-national-greenhouse-gas-inventories/)  
1285 [inventories/](https://www.ipcc.ch/report/2006-ipcc-guidelines-for-national-greenhouse-gas-inventories/) (accessed 15 August 2021).

1286

1287 Jiang, T., Zhang, Y., & Jin, Q. (2021). Sustainability efficiency assessment of listed companies  
 1288 in China: a super-efficiency SBM-DEA model considering undesirable output.  
 1289 *Environmental Science and Pollution Research*, 1-17.

1290 Jobert T., Karanfil F., & Tykhonenko A.. (2010). Convergence of per capita CO2 emission in  
 1291 the EU: Legend or reality?. *Energy Economics*, 32(6), 1364-1373. Leontief, W. (1974).  
 1292 Environmental repercussions and the economic structure: An input-output approach: A  
 1293 reply. *Review of Economics and Statistics*, 56(1), 109-110.

1294 Karmellos, M., Kopidou, D., & Diakoulaki, D. (2016). A decomposition analysis of the driving  
 1295 factors of co2 (carbon dioxide) emissions from the power sector in the european union  
 1296 countries. *Energy*, 94(9), 680-692.

1297 Lin, B., & Xuan, X. (2015). CO<sub>2</sub> emissions of China's food industry: an input-output approach.  
 1298 *Journal of Cleaner Production*, 112(2), 1410-1421.

1299 Liu, N., Ma, Z., & Kang, J. (2015). Changes in carbon intensity in china's industrial sector:  
 1300 Decomposition and attribution analysis. *Energy Policy*, 87, 28-38.

1301 Maruyama, N., & Eckelman, M. J. (2009). Long-term trends of electric efficiencies in  
 1302 electricity generation in developing countries. *Energy Policy*, 37(5), 1678-1686.

1303 Mi, Z., Meng, J., Guan, D., Shan, Y., Liu, Z., & Wang, Y., et al. (2017). Pattern changes in  
 1304 determinants of Chinese emissions. *Environmental Research Letters*, 12(7), 074003.

1305 Mi, Z., Zheng, J., Meng, J., Ou, J., & Wei, Y. M.. (2020). Economic development and  
 1306 converging household carbon footprints in China. *Nature Sustainability*, 3, 529-537.

1307 National Bureau of Statistics (2016) China Statistical Yearbook. (Online). Available at:  
 1308 <http://www.stats.gov.cn/tjsj/ndsj/2016/indexch.htm> (accessed 15 August 2021).

1309 National Energy Administration (2013) Notice of The State Council on the issuance of the 12th  
 1310 Five-Year Plan for energy Development . (Online). Available at:  
 1311 [http://www.nea.gov.cn/2013-01/28/c\\_132132808.htm](http://www.nea.gov.cn/2013-01/28/c_132132808.htm) (accessed 1 January 2013).

1312 National Energy Administration (2016) The total electricity consumption in 2015. (Online).  
 1313 Available at: [http://www.nea.gov.cn/2016-01/15/c\\_135013789.htm](http://www.nea.gov.cn/2016-01/15/c_135013789.htm) (accessed 15 January  
 1314 2016).

1315 Ouyang, X., & Lin, B. (2015). An analysis of the driving forces of energy-related carbon  
 1316 dioxide emissions in China's industrial sector. *Renewable and Sustainable Energy Reviews*,  
 1317 45, 838-849.

1318 Paul A.S. (2007). Decomposition for emission baseline setting in china's electricity sector.  
 1319 *Energy Policy*, 35(1), 280-294.

1320 Peng, X., & Tao, X. (2018). Decomposition of carbon intensity in electricity production:  
 1321 Technological innovation and structural adjustment in china's electricity sector. *Journal of  
 1322 Cleaner Production*, 172, 805-818.

1323 Peters, G. P., Weber, C. L., Dabo, G., & Klaus, H. (2007). China's growing CO<sub>2</sub> emissions - A  
 1324 race between increasing consumption and efficiency gains. *Environmental Science and  
 1325 Technology*, 41(17), 5939-5944.

1326 Rao, X., Wu, J., Zhang, Z., & Liu, B. (2012). Energy efficiency and energy saving potential in  
 1327 China: An analysis based on slacks-based measure model. *Computers and Industrial  
 1328 Engineering*, 63(3), 578-584.

1329 Su, B., & Ang, B.W. (2012). Structural decomposition analysis applied to energy and emissions:

1330 some methodological developments. *Energy Economics*, 34, 177-188.

1331 Su, B., Ang, B.W., & Low, M. (2013). Input-output analysis of CO<sub>2</sub> emissions embodied in  
1332 trade and the driving forces: processing and normal exports. *Ecological Economics*, 88,  
1333 119-125.

1334 Sun, S., & Huang, C., (2021). Energy structure evaluation and optimization in BRICS: A  
1335 dynamic analysis based on a slack based measurement DEA with undesirable outputs.  
1336 *Energy*, 216:119251.

1337 Sun, J.W. (2005). The decrease of CO<sub>2</sub> emission intensity is decarbonization at national and  
1338 global levels. *Energy Policy*, 33(8), 975-978.

1339 Stone, R., Brown, A. (1962). A Computable Model of Economic Growth. A Program for Growth  
1340 Series. London: Chapman and Hall.

1341 Tian, X., Chang, M., Lin, C., & Hiroki, T. (2014). China's carbon footprint: A regional  
1342 perspective on the effect of transitions in consumption and production patterns. *Applied*  
1343 *Energy*, 123(1), 19-28.

1344 Wang, X., Huang, K., Yu, Y., Hu, T., & Xu, Y. (2016). An input-  
1345 output structural decomposition analysis of changes in sectoral water footprint in china.  
1346 *Ecological Indicators*, 69, 26-34.

1347 Toh, M. (1998). The ras approach in updating input-output matrices: an instrumental variable  
1348 interpretation and analysis of structural change. *Economic Systems Research*, 10(1), 63-  
1349 78.

1350 Tone, K. (2001). A slacks-based measure of efficiency in data envelopment analysis. *European*  
1351 *Journal of Operational Research*, 130(3), 498-509.

1352 Wei, J., Huang K., Yang, S., Li, Y., Hu, T., & Zhang, Y. (2017). Driving forces analysis of  
1353 energy-related carbon dioxide (CO<sub>2</sub>) emissions in Beijing: An input-output structural  
1354 decomposition analysis. *Journal of Cleaner Production*, 163, 58-68.

1355 Wang, X. (2010). Decomposition analysis of electricity intensity over 1998–2007 in China.  
1356 International Conference on Advances in Energy Engineering, Beijing, 2010, 85-88, doi:  
1357 10.1109/ICAEE.2010.5557607.

1358 Wang S., Zhu X., Song, D., We, Z., Chen, B., & Feng, K.(2019). Drivers of CO<sub>2</sub> emissions from  
1359 electricity generation in china based on modified structural decomposition analysis.  
1360 *Journal of Cleaner Production*, 220, 1143-1155.

1361 Yamakawa, A., & Peters, G.P. (2011). Structural decomposition analysis of greenhouse gas  
1362 emissions in norway 1990–2002. *Economic Systems Research*, 23(3), 303-318.

1363 Yang, H. (2009). Incorporating both undesirable outputs and uncontrollable variables into dea:  
1364 The performance of chinese coal-fired electricity plants. *European Journal of Operational*  
1365 *Research*, 197(3), 1095-1105.

1366 Yang, H., & Pollitt, M. (2010). The necessity of distinguishing weak and strong disposability  
1367 among undesirable outputs in DEA: Environmental performance of chinese coal-fired  
1368 electricity plants. *Energy Policy*, 38(8), 4440-4444.

1369 Yang, L., & Lin, B. (2016). Carbon dioxide-emission in china's electricity industry: Evidence  
1370 and policy implications. *Renewable and Sustainable Energy Reviews*, 60, 258-267.

1371 Zhang, C., Heller, T. C., & May, M. M. (2005). Carbon intensity of electricity generation and  
1372 CDM baseline: case studies of three Chinese provinces. *Energy Policy*, 33(4), 451-465.

1373 Zhang K., Li W., Han Y., et al., (2021). Production capacity identification and analysis using  
novel multivariate nonlinear regression: Application to resource optimization of industrial

1374 processes. *Journal of Cleaner Production*, 282, 124469.

1375 Zhang, M., Liu, X., Wang, W. & Zhou, M. (2013). Decomposition analysis of CO<sub>2</sub> emissions  
1376 from electricity generation in China. *Energy Policy*, 52, 159-165.

1377 Zhang, N., & Choi, Y. (2013). Total-factor carbon emission performance of fossil fuel electricity  
1378 plants in china: A metafrontier non-radial malmquist index analysis. *Energy Economics*,  
1379 40(2), 549-559.

1380 Zhang, Z.Q., Qu, J. S., & Zeng, J.J. (2008). A Quantitative comparison and analysis on the  
1381 assessment indicators of greenhouse gases emission. *Journal of Geographical Sciences*,  
1382 18(4), 387-399.

1383 Zhao, X., Xi, Z., & Shuai, S. (2016). Decoupling CO<sub>2</sub> emissions and industrial growth in china  
1384 over 1993-2013: The role of investment. *Energy Economics*, 60, 275-292.

1385 Zhao, X., Zhang, X., Li, N., Shao, S., & Geng, Y. (2016). Decoupling economic growth from  
1386 carbon dioxide emissions in china: A sectoral factor decomposition analysis. *Journal of  
1387 Cleaner Production*, 142, 3500-3516.

1388 Zheng, J., Mi, Z., Coffman, D., et al. (2019). Regional development and carbon emissions in  
1389 China. *Energy Economics*, 81, 25-36.

1390 Zhou, G., Chung, W., & Zhang, Y. (2014). Carbon dioxide emissions and energy efficiency  
1391 analysis of china's regional thermal electricity generation. *Journal of Cleaner Production*,  
1392 83, 173-184.

1393 Zhou, P., & Wang, H. (2012). Energy and CO<sub>2</sub> emission performance in electricity generation:  
1394 A non-radial directional distance function approach. *European Journal of Operational  
1395 Research*, 221(3), 625-635.

1396 Zhou, P., Ang, B. W., & Han, J. Y. (2010). Total factor carbon emission performance: A  
1397 malmquist index analysis. *Energy Economics*, 32(1), 194-201.

1398